

Manuscript Details

Manuscript number	COMPAG_2017_608
Title	Multi-Vehicle Refill Scheduling with Queueing
Article type	Research Paper

Abstract

We consider the problem of refill scheduling for a team of vehicles or robots that must contend for access to a single physical location for refilling. The objective is to minimise time spent in travelling to/from the refill station, and also time lost to queuing (waiting for access). In this paper, we present principled results for this problem in the context of agricultural operations. We first establish that the problem is NP-hard and prove that the maximum number of vehicles that can usefully work together is bounded. We then focus on the design of practical algorithms and present two solutions. The first is an exact algorithm based on dynamic programming that is suitable for small problem instances. The second is an approximate anytime algorithm based on the branch and bound approach that is suitable for large problem instances with many robots. We present simulated results of our algorithms for three classes of agricultural work that cover a range of operations: spot spraying, broadcast spraying and slurry application. We show that the algorithm is reasonably robust to inaccurate prediction of resource utilisation rate, which is difficult to estimate in cases such as spot application of herbicide for weed control, and validate its performance in simulation using realistic scenarios with up to 30 robots.

Keywords	agricultural robotics; multi-robot systems; refill scheduling; queuing; weed control
Corresponding Author	Giovanni D'urso
Corresponding Author's Institution	University of Sydney
Order of Authors	Giovanni D'urso, Stephen Smith, Ramgopal Mettu, Timo Oksanen, Robert Fitch
Suggested reviewers	Qin Zhang, Claus Sørensen, Dylan Shell, Stavros Vougioukas

Submission Files Included in this PDF

File Name [File Type]

multivehicle_refilling_with_queueing.pdf [Manuscript File]

Submission Files Not Included in this PDF

File Name [File Type]

cover_letter.txt [Cover Letter]

highlights.txt [Highlights]

multivehicle_refilling_with_queueing.zip [LaTeX Source File]

To view all the submission files, including those not included in the PDF, click on the manuscript title on your EVISE Homepage, then click 'Download zip file'.

Multi-Vehicle Refill Scheduling with Queueing

Giovanni D’Urso^{a,*}, Stephen L. Smith^b, Ramgopal Mettu^{c,1}, Timo Oksanen^d, Robert Fitch^{e,2}

^a*Australian Centre for Field Robotics, The University of Sydney*

^b*Department of Electrical and Computer Engineering, University of Waterloo*

^c*Department of Computer Science, Tulane University*

^d*Department of Electrical Engineering and Automation, Aalto University*

^e*Centre for Autonomous Systems, University of Technology Sydney*

Abstract

We consider the problem of refill scheduling for a team of vehicles or robots that must contend for access to a single physical location for refilling. The objective is to minimise time spent in travelling to/from the refill station, and also time lost to queueing (waiting for access). In this paper, we present principled results for this problem in the context of agricultural operations. We first establish that the problem is NP-hard and prove that the maximum number of vehicles that can usefully work together is bounded. We then focus on the design of practical algorithms and present two solutions. The first is an exact algorithm based on dynamic programming that is suitable for small problem instances. The second is an approximate anytime algorithm based on the branch and bound approach that is suitable for large problem instances with many robots. We present simulated results of our algorithms for three classes of agricultural work that cover a range of operations: spot spraying, broadcast spraying and slurry application. We show that the algorithm is reasonably robust to inaccurate prediction of resource utilisation rate, which is difficult to estimate in cases such as spot application of herbicide for weed control, and validate its performance in simulation using realistic scenarios with up to 30 robots.

Keywords: Agricultural robotics, Multi-robot systems, Multi-robot scheduling, Multi-vehicle scheduling, Refill scheduling, Queueing, Spot spraying, broadcast spraying, slurry application

1. Introduction

In agricultural operations, timing is crucial; if operations are completed too early, or specifically too late, profitability is reduced due to decreases in crop yield or quality. Timing of operations can be negatively impacted by issues with the required components, such as: agricultural vehicle(s), the

*Corresponding author

Email addresses: `g.durso@acfr.usyd.edu.au` (Giovanni D’Urso), `stephen.smith@uwaterloo.ca` (Stephen L. Smith), `rmettu@tulane.edu` (Ramgopal Mettu), `timo.oksanen@aalto.fi` (Timo Oksanen), `rfitch@uts.edu.au` (Robert Fitch)

¹This work was done while the author was supported by an IRCA fellowship at The University of Sydney.

²This work was done in part when the author was with The University of Sydney.

5 input material (seeds, fertilizer, herbicide, etc.), and the driver(s). Late completion of the opera-
6 tion can be caused by too few machines, problems in logistics of input material, and availability of
7 driver/operator. By using robotics, the issue of driver/operator availability can be solved through
8 *autonomous* operation. However, core questions remain concerning the proper number of machines to
9 use and the parameters of these machines, such as operational width. In the case of multiple machines
10 (autonomous or human driven) the logistics of input material also plays an important role with respect
11 to operational efficiency.

12 Operational efficiency, or more specifically *field efficiency*, is defined in the ASAE D497.7 (2011)
13 standard as the real operational performance of a vehicle compared to its theoretical maximum with
14 the given speed and width, without turns. Field efficiency is less than 100% due to turning, irregularly
15 shaped field plots, and refilling, among other factors. Derived from collected data, the ASAE D497.7
16 (2011) standard defines 70% (+/- 10%) field efficiency for fertiliser spreaders and 65% (+/-15%) for
17 boom sprayers. These numbers are typically used when selecting the proper size of machine for a
18 specific farm.

19 In the case of multiple robots or vehicles, an important factor in maintaining high field efficiency
20 is to determine the proper refill timing for each unit. Refilling the container of the vehicle with seeds,
21 fertilisers, herbicide, fungicide, pesticide, manure, slurry, lime or fuel is usually done at the edge of
22 the field area. Refilling, or replenishing, the supply of input materials must be done semi-regularly at
23 refill stations and the refill procedure can require a substantial amount of time. Due to varying shaped
24 fields and the distances that vehicles must travel to the refill station, the order in which vehicles are
25 refilled cannot always be the same. Otherwise, the quickest vehicle with the shortest routes has to
26 wait until the others have refilled. Harvesting operations where tanks are emptied at the edge of the
27 field or at a central storage location are analogous to refilling, but for simplicity, in this work we focus
28 our discussion on refilling. If multiple vehicles work simultaneously, a given vehicle may need to wait
29 its turn, or *queue*, at the refill station.

30 We are interested in understanding the optimisation problem that arises in these scenarios: at what
31 points in time should a vehicle pause its work and travel to a refill station such that total refill time
32 (travel, queuing, and refilling) is minimised? We refer to this optimisation problem as *refill scheduling*
33 *with queuing*.

34 The refill scheduling problem is relevant to both traditional and robotic agricultural operations. In
35 traditional broadacre agriculture, for example, broadcast spray rig operators typically employ a *greedy*
36 decision strategy where they wait until the spray tank is empty and then drive to the refill station.
37 This strategy, unfortunately, can lead to surprisingly large time losses. Agricultural robots are subject
38 to similar, or worse, time losses (Richards et al., 2015). These losses are exacerbated in small, relatively
39 slow-moving robot systems operating in large areas; a single round-trip to a refill station can require

40 several hours of travel time, as we show through experiments in Sec. 6. It is critically important to
41 develop a principled theoretical understanding of this problem in order to design efficient algorithms
42 that will support current and future applications of agricultural robots, and increase efficiency in
43 traditional operations.

44 Interestingly, there has been surprisingly little work that addresses refill scheduling with queu-
45 ing. Oksanen and Visala (2009) proposed an efficient greedy algorithm that addresses travel time, but
46 not queuing. Bochtis and Sorensen (2009) formulated a variety of related problems under the umbrella
47 of the vehicle routing problem, which is NP-hard, but did not provide a rigorous complexity analysis.
48 The existence of polynomial-time algorithms for certain variants (Oksanen and Visala, 2009; Patten
49 et al., 2016) contradicts the assumption that all variants that can be formulated as vehicle routing
50 problems are NP-hard, and thus motivates the need for a more rigorous approach.

51 In this paper, we present analysis and algorithms for refill scheduling with queuing. We show that,
52 although polynomial-time algorithms exist for the case of instantaneous refill time, the general problem
53 with non-zero refill time is NP-hard. We also show that the ratio of working time to refill time imposes
54 a limit on the number of vehicles that can work together productively given a single refill station. Based
55 on this analysis, we present two algorithms. The first is an exact algorithms that computes an optimal
56 refill schedule, but is infeasible in practice for all but the smallest problem instances. The second
57 algorithm computes an approximately optimal solution and is effective in practice. The algorithm
58 maintains upper and lower bounds on the optimal solution, and tightens these bounds iteratively.
59 Thus, the algorithm produces higher quality solutions given more computation time, but can produce
60 a valid solution at any time. An algorithm with this property is known as an *anytime* algorithm.

61 We report simulation results, using examples of spot spraying, broadcast spraying and slurry spread-
62 ing robots, that characterise the practical performance of our solution in comparison to the greedy
63 approach. Our results show that the performance gap between methods, measured in terms of total
64 time attributed to refilling, can be wide. Importantly, we also analyse the sensitivity of our solution to
65 variations in the actual rate of resource consumption versus the estimated rate. This analysis shows
66 that our algorithm exhibits reasonable performance, particularly in the case where the usage rate is
67 overestimated, and motivates further work in developing methods that directly consider uncertainty
68 in the consumption rate estimate.

69 The contributions of this work are to provide the first complexity analysis of the refill scheduling
70 with queuing problem, and to present exact and approximate solutions. Our algorithms support the
71 design of software tools that apply to any agricultural robot system that consumes and refills physical
72 resources, and similarly to manually operated agricultural vehicles.

73 Throughout the paper, we use the term *robot* to loosely imply either an autonomous or human-
74 operated vehicle. We use the term *field plot* to mean an agricultural area where crops are grown.

2. Related Work

The work most closely related to ours is by Oksanen and Visala (2009), who propose a greedy algorithm for refill scheduling to reduce time lost in travelling to and from a refill station. The robot monitors its resource level and greedily chooses when to refill. In our previous work, we give an optimal polynomial-time algorithm for this case (Patten et al., 2016). Neither paper, however, considers queuing.

A series of papers has explored the idea of modelling a wide range of optimisation problems in agricultural field operations as instances of the general vehicle routing problem (VRP) (Bochtis and Sorensen, 2009, 2010; Jensen et al., 2015a,b). This work is important for multiple reasons; it focuses attention on the benefits of addressing the computational problems inherent in field operations, and provides a pathway to the convenient use of off-the-shelf solvers. However, there are two severe limitations of this approach. First, the VRP cannot express all possible computational problems of interest to field operations. The problem we study in this paper is one such instance. Second, formulating a problem as an instance of a VRP does not theoretically imply that the problem is as computationally difficult as the VRP. Our previous work (Patten et al., 2016) provides a concrete example of a variant that can be solved in polynomial-time, but also can be (undesirably) formulated as a VRP.

The branch and bound approach is one method that can be used to solve VRPs (Toth and Vigo, 2002) and a wide range of other problems such as information gathering (Best and Fitch, 2016; Binney and Sukhatme, 2012). In adopting this approach, it is necessary to compute upper and lower bounds on the cost of the (unknown) optimal solution. We develop specific algorithmic procedures for calculating bounds that both minimise total refill time (including queuing) and also exhibit reasonable run-time performance. Our work also allows for replanning to account for uncertainty in usage rate estimation, as in Edwards et al. (2015), but we show that replanning is not always necessary.

The problem of computing a plan that visits the entire area of a field plot is an instance of *coverage planning*, a well-studied problem in robotics. A recent survey can be found in Galceran and Carreras (2013). Both single- and multi-robot coverage are NP-hard problems (Rekleitis et al., 2008), but reasonable solutions can be computed using simple methods such as the *boustrophedon decomposition* (Choset et al., 2005). Recent work specific to agricultural applications focuses on choosing an optimal track orientation (Oksanen and Visala, 2009; Jin and Tang, 2011; Hameed, 2014). Here, we assume that track orientation is given, and that the output of a coverage planner is also given. These are reasonable assumptions because track orientation is often fixed ahead of time (as in controlled traffic farming), and coverage planning solutions for this case are readily available in the literature.

Our formulation of refill scheduling is related to the problems of fixed-route vehicle refuelling (Suzuki,

109 2014; Lin et al., 2007) and electric vehicle recharging (Schneider et al., 2014; Bruglieri et al., 2015;
110 Keskin and Catay, 2016). This work does not address queuing, however. Nam and Shell (2015) address
111 resource contention, but in the context of multi-robot task allocation which does not directly apply to
112 refill scheduling.

113 In our work we assume that a given field plot has been segmented and that the area to be covered
114 by each robot is thus known. Another view of the refilling problem is then as a scheduling problem in
115 which refilling each robot is a task that must be scheduled periodically (i.e., the span of time in which a
116 robot does not refill has a hard upper bound). At any point on the path of a robot, there exists a fixed
117 cost to schedule the task that is simply the travel distance to the refill station. Then, the goal is to
118 schedule k tasks in a periodic fashion so as to minimise total time spent due to queuing and scheduling
119 costs. This problem bears closest resemblance to *group interval scheduling* (Keil, 1992), in which a
120 set of n independent tasks of possibly differing execution times must be scheduled for execution. This
121 problem is considerably simpler than ours and, due to the queuing costs, even a simple problem has an
122 exponentially sized number of jobs. Our problem can also be formulated as other scheduling problem
123 variants (Leung, 2004). However, these formulations are not practical and are hard to solve (Chen
124 et al., 1998) due to the number of intervals involved.

125 3. Problem Statement and Characterisation

126 In this section we explain our formulation of the problem, prove that the problem is NP-hard, and
127 provide bounds on the amount of work that multiple robots can perform concurrently.

128 Intuitively, we define the refill scheduling problem as the question of how to modify robots' paths
129 by judiciously splicing in trips to a refill station. In other words, the problem is how to take an initial
130 path in which a robot prematurely exhausts its resource (herbicide, for example), and create a new
131 path by choosing points at which the robot stops and refills. This new path is constructed such that
132 the robot can complete its work without running empty. We would like to minimise the additional time
133 spent in refilling, which includes travel, queuing, and the refill operation itself. We assume that we are
134 given: the number of robots, a path that completes the task without refilling, and the performance
135 characteristics of the robots (e.g., travel speed, resource usage rate, refill rate). We further assume
136 that the robots are identical, or *homogeneous* and that resource usage rate is constant within a field
137 plot. Because we are motivated by agricultural applications, we assume that a robot must traverse a
138 road network to reach the refill station, as opposed to taking the shortest obstacle free path (which
139 likely would involve the undesirable arbitrary traversal of a field plot). Two potential solutions for an
140 example problem are shown in Fig. 1.

141 Formally, we state the refilling problem as follows. We are given a graph $G = (V, E)$ whose vertices

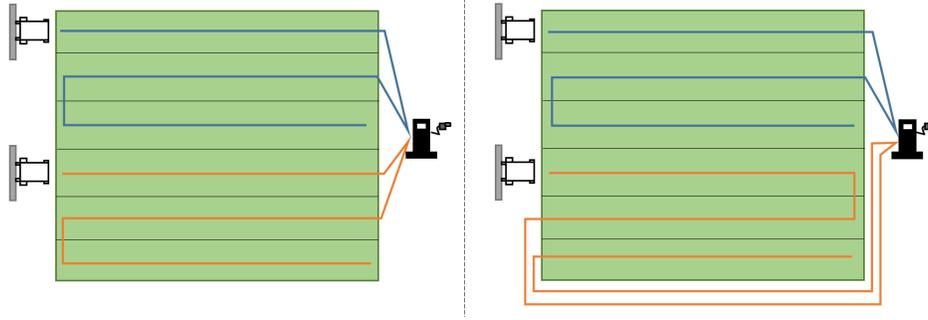


Figure 1: An example multi-robot refill scheduling problem where each robot needs to perform at least one refill. The left schedule may appear optimal, but if the refill time is lengthy, the right could be less costly. By forcing one of the robots to take a longer path to the refill station and incurring a longer travel cost, queuing can be avoided.

142 represent waypoints in the field plot, and whose edges represent travel between waypoints (i.e., straight
 143 line travel, turns etc.). There are k robots, and each robot is assigned a portion of the field plot *a priori*.
 144 The vertices are partitioned accordingly into sets V^1, V^2, \dots, V^k . Robot j must cover all vertices in V^j
 145 to complete its task and can decide at each vertex whether to refill its resource. Naturally, we assume
 146 that the capacity of each robot is insufficient to fully complete its assigned task without refilling;
 147 otherwise we would not have to make any refilling decisions along the path.

148 For notational simplicity, we assume that the field plot is equally partitioned and that each set V^j
 149 has n vertices. We also assume without loss of generality that robot j visits vertices V^j in sequence
 150 (i.e., $v_1^j, v_2^j, \dots, v_n^j$). We denote the edge (v_i^j, v_{i+1}^j) as e_i^j for convenience. We consider the refilling
 151 problem with a single refill station at a fixed location in the field plot. Let T_d denote the capacity of
 152 the resource held by the robot (e.g., charge, fertiliser, herbicide, etc.) which decreases at a known rate
 153 R_f during operation, and let T_w be the amount of time the robot can work before refilling (equivalent
 154 to $T_w = R_f/T_d$). Let T_r denote the amount of time needed to refill from empty. We assume that a
 155 robot can also refill from a non-empty state in proportionately less time (i.e., $T_r/2$ time to refill from
 156 $T_d/2$ capacity). We assume that the robot starts with full capacity and must complete its task with
 157 full capacity. At vertex v_i^j , robot j is also assigned a travel time cost r_i^j for travelling to and from
 158 the refill station. We define the time spent working and travelling between subsequent vertices v_i^j and
 159 v_{i+1}^j without refilling as $d(v_i^j, v_{i+1}^j)$. Thus, the time cost for working and travelling without refilling
 160 between two given vertices: v_i^j and v_m^j is $d(v_i^j, v_m^j) = \sum_{c=i}^{m-1} d(v_c^j, v_{c+1}^j)$. This is equivalent to the sum
 161 of the time taken to traverse each edge in the path between the two vertices.

162 Our goal is to select, for each robot j , a set of waypoints $W^j \subseteq V^j$ that defines the points where
 163 robot j will stop working and perform a refill operation. In order to capture traversal from the
 164 start to the first chosen waypoint, W^j must contain v_1^j , the first vertex in a robot's path. We now
 165 formally define the objective function we are interested in optimising. We need to select subsets W^j ,

166 $j \in \{1, \dots, k\}$ that minimise the total refill and waiting times:

$$\sum_{j=1}^k \sum_{v_i \in W^j} \left(r_i^j + T_r \cdot (1 - f(v_i, v_{i+1})) + Q(v_i, W^1, \dots, W^k) \right) \quad (1)$$

Subject to $f(v_i, v_{i+1}) \leq T_d \quad \forall v_i \in W^j$

167 Where $Q(\cdot)$ measures the waiting time for robot j after travelling to the refill station from vertex
 168 v_i^j . Function $f(v_i, v_m)$ is the amount of resource used to traverse from vertex v_i to another vertex v_m
 169 without refilling.

170 3.1. Complexity Analysis

171 In this section we prove the complexity class of the refilling problem by reducing the group interval
 172 scheduling problem to it. The reduction uses the fact that the group interval scheduling problem has
 173 been proven to be NP-complete to prove the complexity of the refilling problem.

174 The group interval scheduling problem is defined as follows.

175 **Problem 3.1** (Group interval scheduling problem). We are given m sets (groups), each containing
 176 several nonempty intervals of $\mathbb{R}_{\geq 0}$. We write set T_j , $j \in \{1, \dots, m\}$ as

$$T_j = \{[s_1^j, e_1^j], \dots, [s_{n_j}^j, e_{n_j}^j]\}.$$

177 Does there exist a selection of one interval from each set T_j such that all intervals are pairwise disjoint?

178 This problem is NP-complete, even when each interval has identical width and each group has the
 179 same number of intervals (Keil, 1992). We use this problem to establish the following result.

180 **Theorem 3.2.** *The multi-robot refilling problem is NP-hard.*

181 *Proof.* Consider an instance of group interval scheduling in which each group contains n intervals of
 182 equal width. To establish the result, we give a reduction from this instance of group interval scheduling
 183 to multi-robot refilling (that is, we show how an optimal algorithm for multi-robot refilling could be
 184 used to solve group interval scheduling). Consider a group T_j for some $j \in \{1, \dots, m\}$, which consists
 185 of intervals $[s_i^j, e_i^j]$, for $i \in \{1, \dots, n\}$. We begin by sorting the intervals such that $s_1^j \leq s_2^j \leq \dots \leq s_n^j$.
 186 Since each interval has equal width, there is a constant $\Delta t > 0$ such that for each j ,

$$e_j - s_j = \Delta t.$$

187 To encode this group of intervals as a multi-robot refilling problem, we introduce a robot j with a
 188 path $v_s^j, v_1^j, v_2^j, \dots, v_n^j, v_f^j$, where v_s^j and v_f^j are the start and finish vertices of the robot path, and
 189 $v_1^j, v_2^j, \dots, v_n^j$ are n intermediate vertices.

We define the resource consumed to move between vertices on this path as

$$\begin{aligned} f(v_s^j, v_1^j) &= \frac{1}{2} \\ f(v_i^j, v_{i+1}^j) &\geq 0 \quad \text{for all } i \in \{1, \dots, n-1\} \\ f(v_n^j, v_f^j) &= \frac{1}{2}, \end{aligned}$$

190 where the terms $f(v_i^j, v_{i+1}^j)$ are any positive numbers satisfying

$$\sum_{i=1}^{n-1} f(v_i^j, v_{i+1}^j) = \frac{1}{2}.$$

191 By this construction, one-half of the resource tank is required to travel from the start v_s^j to v_1^j . Another
192 one-half of the tank is needed to travel from v_1^j to v_n^j . Finally, one-half of the tank is needed to travel
193 from v_n^j to the finish v_f^j . Since the total resource needed from start to finish is one and one-half tanks,
194 the robot must refill at least once.

195 We define the tank to be full when the robot starts at v_s^j , and allow the tank to reach empty at the
196 moment when v_f^j is reached. Notice that by this construction, the robot can reach v_f^j with an empty
197 tank by refilling exactly one-half of its tank at any of the vertices v_1^j, \dots, v_n^j .

198 Next, we define the time T_r to refill as

$$\frac{1}{2}T_r = \Delta t.$$

199 We fix a constant $c > 0$, and define the time to travel from vertex i to and from the refill station as
200 $r_i^j = c$ for each vertex i . The time from vertex i to the refill station is $c/2$, as is the time from the refill
201 station back to vertex i .

202 Finally, the times to travel between vertices $d(\cdot, \cdot)$ are defined such that if the robot travels directly
203 from v_s^j to v_i^j without refilling, then it arrives at vertex v_i^j at the time $s_i^j - c/2$. Thus, in this case the
204 robot arrives at the refill station at time s_i^j , and if there is no wait to refill, it finishes refilling at time
205 e_i^j .

206 From this construction, the minimum amount of time for robot j to complete its path is achieved
207 by refilling exactly once at a vertex v_i^j without any wait at the station. In this case the total time is

$$d(v_s^j, v_i^j) + \frac{c}{2} + \Delta t + \frac{c}{2} + d(v_i^j, v_f^j) = d(v_s^j, v_f^j) + c + \Delta t.$$

208 Any solution in which the robot refills more than once will incur the cost c twice, and thus will require
209 strictly more time. Moreover, any solution in which the robot must wait to refill will result in the
210 robot departing the refill station at a time after e_i^j and thus a strictly larger time.

211 Therefore, after performing this construction for each group of intervals $j \in \{1, \dots, m\}$, we have a
212 multi-robot refilling problem with m robots. If the optimal refilling schedule for this problem has each

213 robot refill exactly once, and with no waiting, then the corresponding refill vertices v_i^j for each robot j
 214 yield an interval from each set T_j that are pairwise disjoint, and thus show that there exists a solution
 215 to the group interval scheduling problem. If the optimal refilling schedule requires multiple refills for a
 216 robot, or requires a robot to wait, then there is no solution to the group interval scheduling problem.
 217 Since the construction of the multi-robot refilling instance can be performed in polynomial time, the
 218 reduction is complete, and the result established. \square

219 In our proof we assume each robot has the initial condition of a full tank and the termination
 220 condition of an empty tank. We conjecture that a similar proof can be formulated for the more general
 221 cases of arbitrary initial and termination conditions for problem variants with those properties.

222 3.2. A Bound on Concurrency

223 In this section we give a bound on the maximum number of robots that can work concurrently
 224 without queuing. This bound is a function of the refill operation length (T_w/T_r).

225 Let k_{max} be the maximum number of robots that can effectively work together such that all robots
 226 are either working or refilling (i.e., no robots are queuing at the refill station). For the purposes of this
 227 proof, we also assume that there is no travel cost involved in travelling to the refill station.

228 Given the definition of k_{max} , we can prove that this number is essentially limited by the ratio of a
 229 robot's *work time* (how long a robot can work before needing to refill) to *refill time* (how long it takes
 230 for a robot to refill itself to maximum capacity).

231 **Theorem 3.3.** *The maximum number of effective working robots k_{max} satisfies $k_{max} \leq \frac{T_w}{T_r} + 1$.*

232 *Proof.* Let t_1 and t_2 be points in time during the schedule. We define $F^j(t)$ as the remaining amount
 233 of resource for robot j at time t . We then define a steady-state time interval T as

$$\begin{aligned}
 T &= \min(t_2 - t_1) & (2) \\
 \text{subject to} & \quad t_2 > t_1 \\
 & \quad F^j(t_1) = F^j(t_2) \forall j \in (1, \dots, k)
 \end{aligned}$$

234 such that T is a sufficiently long minimal time window. This time window is a “snapshot” of the
 235 system in operation. At the start of this time interval, each robot has a certain capacity remaining
 236 before needing to refill. By *steady-state*, we mean that each robot has the same capacity at the end of
 237 the time interval as it had at the start.

238 In order to maintain capacity according to our definition of steady-state, any work time in T must
 239 be balanced by an equivalent amount of refill time, which we denote as R . The refill time can be split
 240 across multiple refill events. Time R is simply the refill time required *in total* to maintain capacity
 241 within the given time interval.

242 We define R in terms of depletion and refill time: $R = T(\frac{T_r}{T_r+T_w})$. Now, in order for no robot
 243 to queue, the sum of refill times of all robots must not exceed the total time available, which is T .
 244 Therefore, we have $kR \leq T$.

245 Now we solve for k in order to determine k_{max} . Rearranging terms, we have $k \leq \frac{T}{R}$. Substituting
 246 for R , we get $k \leq \frac{T}{T(\frac{T_r}{T_r+T_w})}$. Eliminating T , we have $k \leq \frac{1}{\frac{T_r}{T_r+T_w}} = \frac{T_w}{T_r} + 1$, as claimed. \square

247 This theorem implies that it is not always advantageous to construct very large robot teams; excess
 248 robots will simply queue for the refill station indefinitely. Conversely, any increase in productivity of a
 249 system through robots working in parallel necessarily involves an appropriate increase in the number
 250 or capacity of refill stations. This notion is intuitive but the value of our formalism is to provide simple
 251 analytical methods for designing systems.

252 4. Exact Solution

253 In this section we present our first solution approach, which solves the refill scheduling problem
 254 optimally. We then briefly discuss the applicability of this solution in practice.

255 The algorithm we present is based on an algorithmic technique known as *dynamic program-*
 256 *ming (DP)* (Cormen et al., 2001). DP is a method of finding an exactly *optimal* or “best” solution
 257 to a problem with respect to some metric or *cost function*. DP works by breaking the initially large
 258 and hard-to-solve problem into smaller subproblems that can be solved more easily. A problem that
 259 can be solved by combining optimal solutions to subproblems is said to have the property of *optimal*
 260 *substructure*. Utilising this decomposition allows DP algorithms to recursively compute the optimal
 261 solution by reusing optimal solutions to subproblems, thereby avoiding an exhaustive search over the
 262 solution space. Avoiding exhaustive searching allows dynamic programming to calculate a far smaller
 263 number of possible solutions and thus reduce the amount of computation required to compute an
 264 optimal solution.

265 4.1. Formulation for a Single Robot

266 For exposition, we first we give the optimal substructure for the case in which we have a single
 267 robot (i.e., $k = 1$) that must choose waypoints for refilling. We use the terminology given in Sec. 3
 268 except we drop the superscript since we only have a single robot. For $1 \leq i \leq n$, let t_i be the optimal
 269 cost that is achievable at vertex v_i . Then, we seek to compute t_n , along with refilling decisions at
 270 every vertex. We have that

$$t_n = \min_{i|f(i,n) \leq 1} \left[t_i + d(v_i, v_n) + r_n + T_r \cdot (1 - f(v_i, v_n)) \right], \quad (3)$$

271 where $f(i, n)$ is the resource cost of travelling from v_i to v_n without any refilling. This characterisation
 272 of t_n admits a dynamic programming approach because we can compute t_i , for $1 \leq i \leq n$ successively;
 273 we note that f_i can be computed simultaneously. This algorithm runs in $\mathcal{O}(n^2)$ time.

274 4.2. Formulation for k Robots

275 We can generalise the above formulation by including a term that captures queuing at the refill
 276 station that corresponds to Q in the objective function. Let T_n be the cost of an optimal joint schedule
 277 for all k robots to complete their tasks. We then have that

$$T_n = \min_{A_{1,n}, \dots, A_{k,n}} \left[\sum_{j=1}^n \left(t_n^j + d(v_i, v_n) + r_n^j + \sum_{l|A_{l,n} < A_{j,n}} r_n^l / 2 + T_r \cdot (1 - f(v_i^l, v_n^l)) \right) \right],$$

278 where $A_{j,n}$ is the arrival time of robot j at the refill station from v_n^j . We note that these arrival times
 279 can be computed along with $f(v_i^l, v_n^l)$. For any robots that do not refill, $A_{j,n}$ can be set to a sentinel
 280 value that excludes it from the summation.

281 To give an upper bound on running time we examine the worst case scenario where each robot has
 282 enough resource to reach the penultimate vertex in its schedule without refilling. For each robot, there
 283 are $(n - 1)!$ possible refill schedules, because at each vertex the robot can reach any of the remaining
 284 vertices without refilling. All combinations for the k robots must be considered. Thus, the worst case
 285 running time is $\mathcal{O}([(n - 1)!]^k)$.

286 4.3. Feasibility in Practice

287 Because the refill scheduling problem is NP-hard (proved earlier in Sec. 3.1), it is not feasible to
 288 find an exact solution for large problem instances. However, the exact approach may be useful for
 289 small problem instances and therefore it is interesting to consider the limitations of the exact approach
 290 in practice. The computational cost of considering additional robots is exponential in k due to the
 291 large number of possible schedules that must be evaluated. This combinatorial effect dominates both
 292 the computation and memory cost; solving multi-robot problems exactly, in a timely manner, and
 293 with limited memory resources becomes infeasible. This issue is discussed in more detail in Sec. 6.2.
 294 If the number of robots and rows are limited (such as in smaller scale agriculture operations), the DP
 295 approach is feasible and can be utilised to calculate an exact solution. As we discuss next, we can
 296 address the issues with solving multi-robot problems by considering an approximate solution (with a
 297 provably bounded cost).

298 5. Branch and Bound Solution

299 We mitigate the memory and computation time requirements of our DP approach by designing a
 300 *branch and bound* (*BnB*) algorithm. BnB algorithms search the solution space (all possible solutions)

301 by building a tree that partitions the solution space iteratively. An example is shown in Fig. 2. In
 302 this tree the root corresponds to the entire solution space and its children correspond to a partition
 303 of the solution space. For each of these children we calculate *bounds* on the cost of the partition the
 304 child represents. If a given child is identified to have potential, then a *branching* step is performed
 305 which further partitions the search space. Alternatively if a child has no potential it can be safely
 306 eliminated (*pruned*). This process continues until the algorithm is terminated by a user or completes
 307 its exploration of the search space. A beneficial feature is that the algorithm is anytime: it can be
 308 stopped at any time to output the current best solution. The algorithm also provides the cost for a
 309 given solution along with bounds on the cost of the optimal solution. Hence the algorithm is capable
 310 of giving a quantitative statement of solution quality (nearness to optimal).

311 In this section we formally define our BnB algorithm (Algorithm 1), including algorithms for
 312 computing both upper and lower bounds (Algorithm 2), and branching. We also provide complexity
 313 analysis for the bounds computations, and give branching heuristics that improve the algorithm’s rate
 314 of convergence to an optimal solution.

315 5.1. Branch and Bound Formulation

316 We formulate the branch and bound tree $T = (N, E)$, where nodes (or equivalently, vertices)
 317 N represent refilling stop decisions for k robots, and edges E represent the working area covered
 318 between refill stops. Leaf-to-root paths in the tree encode a complete refill schedule, and paths from
 319 interior nodes to the root likewise represent a partial schedule. We define a node b such that $N_b =$
 320 $\{v_n^1, \dots, v_n^j, \dots, v_n^k\}$ where v_n^j is the n th vertex in V^j for robot j , and N_b^j corresponds to the vertex in
 321 N_b for robot j . Let P_b^j be the path from the root to a given node b for a given robot j .

322 To maintain the resource budget constraint, the BnB tree is constructed only using valid edges. An
 323 edge is valid if no robot exceeds its resource budget $f(N_p, N_c) \leq T_d$, where N_p is a parent node, N_c is a
 324 child node, and $f(l, m)$ is the resource cost of travelling from v_l^j to v_m^j without refilling. Consequently,
 325 we say that a schedule is valid if it consists entirely of valid edges.

326 The cost assigned to a tree node C_b is the sum of the cost to follow a refill schedule P_b and the
 327 cost of performing a refilling operation (including the queuing time cost):

$$C_b = C_p + \left(\sum_{j=1}^k d(N_p^j, N_b^j) + r_p^j + T_r \cdot (1 - f(N_p^j, N_b^j)) + Q(v_b^j, P_b^1, \dots, P_b^k) \right),$$

328 where $d(l, m)$ is the cost of covering the work area between vertices v_l^j and v_m^j , and C_p is the cost of
 329 the parent of node b .

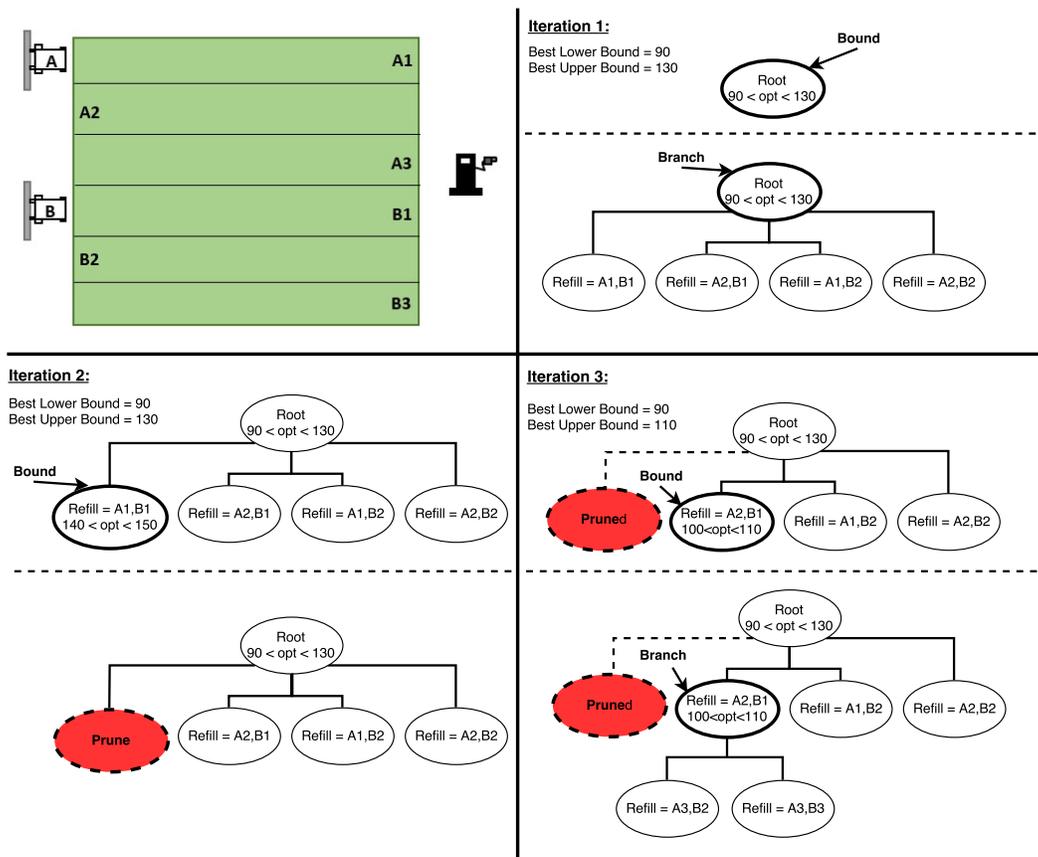


Figure 2: Diagram of BnB tree construction for an example problem with two robots (robot A and robot B). Each robot needs to perform at least one refill before reaching the end of its path, and the letter-number pairs indicate candidate refill locations. At each iteration the BnB algorithm uses its computed bounds to determine which nodes to branch and which to prune. The node examined in Iteration 1 is a branch node because its subtree has potential to contain a better (lower cost) solution than has been found so far. In Iteration 2 the examined node does not have potential to improve the best solution, so it can be safely pruned. This process continues until the entire search space has been examined or the algorithm is terminated by the user.

330 5.2. Computing Upper and Lower Bounds

331 The BnB approach is based on the idea of computing *bounds* on the cost of an (unknown) optimal
 332 solution. Bounds are computed such that the optimal solution cost for a given partition of search
 333 space is known to fall within these bounds, even though the optimal solution's actual cost is unknown.
 334 There are two types of bounds: upper and lower. The actual cost must be at least as large as the lower
 335 bound, but no more than the upper bound. An important computational challenge is to develop an
 336 efficient method of finding bounds that is faster than finding the optimal solution for a given partition.
 337 Otherwise, the benefit of computing bounds is diminished. Pseudocode for computing bounds is
 338 detailed in Algorithm 2.

339 We first address the case of computing lower bounds (LB). The tightest possible lower bound
340 would, of course, be equal to the cost of an optimal solution. However, computing the optimal solution
341 here is infeasible due to the exponential size of the joint action space induced by the interaction of
342 multiple robots. One of the reasons that we need to consider the joint action space is to compute the
343 cost of queuing. It is possible to consider a lower bound that ignores queuing cost, but unfortunately
344 this bound would still be difficult to compute because the problem space remains large. Relaxing the
345 queuing constraint does have a benefit; it also removes interactions between robots and decouples their
346 costs. The lower bound computation we propose makes use of this insight. Rather than reasoning
347 about joint actions, we instead compute a lower bound by considering each robot independently. Recall
348 that each node in the BnB tree encodes a partial schedule. To bound the cost of a complete schedule
349 that passes through a given node, we use the single-robot DP algorithm (Sec. 4.1) to complete the
350 partial schedule optimally. The sum of the single-robot costs underestimates the true cost because it
351 ignores queuing, and therefore represents a lower bound. The computational benefit of this approach
352 is that the bound can be computed in polynomial time.

353 The lower bound for node b is formulated mathematically as:

$$LB_b = C_b + \left(\sum_{j=1}^k \sum_{v_i \in (OPT_b^j \setminus P_b)} d(v_i^j, v_{i+1}^j) + T_r \cdot (1 - f(v_i^j, v_{i+1}^j)) \right)$$

354 where OPT_b^j is an optimal single robot schedule that passes through node b for a given robot j .

355 Computation time can be further reduced by taking advantage of *memoisation* (caching the results
356 of computation). Memoisation is effective here because many of the independent schedules appear in
357 multiple joint schedules. Thus, the algorithm avoids the computational cost of evaluating bounds for
358 any given independent schedule multiple times.

359 The upper bound (UB) is based on the schedules produced by the lower bounds; the single-robot
360 schedules are combined into a multi-robot joint schedule (a schedule for the entire team). The key
361 point is that, because an upper bound must be greater than or equal to the cost of the optimal solution,
362 we must now now consider the cost of queuing. Our approach is to reuse the lower bound solution,
363 but incorporate an estimate of the queuing cost. We sum the costs of the schedules for each robot (as
364 with the lower bound) and add the queuing cost given that joint schedule. The cost of this solution
365 cannot underestimate the optimal (because it is the cost of a complete, valid schedule) and therefore
366 represents a valid upper bound.

367 Formally the upper bound on the cost of node b is defined as:

$$UB_b = \sum_{j=1}^k \sum_{v_i \in OPT_b^j} d(v_i^j, v_{i+1}^j) + T_r \cdot (1 - f(v_i^j, v_{i+1}^j)) + Q(v_i^j, OPT_b^1, \dots, OPT_b^k)$$

368 The upper bound defined in this way can be computed in polynomial time. Its efficiency is due to

369 the polynomial time complexity of evaluating the cost of (as opposed to finding) a joint schedule;
370 evaluating a given schedule does not involve a combinatorial decision, because the refill stops have
371 already been selected.

372 Another benefit of this formulation is that it naturally allows the BnB solution to act as an anytime
373 algorithm. A valid solution is available at any time because the upper bound computation provides a
374 complete valid refill schedule and associated cost. We maintain a copy of the current best upper bound
375 and corresponding schedule, which can be output when the algorithm is terminated. The algorithm can
376 be terminated while it is still searching (after a fixed period of time, for example) for an approximately
377 optimal solution, or it can be allowed to run to completion and will yield an exact optimal solution.
378 The quality of the solutions produced by the upper bound computation are discussed later in Sec. 6.1.

379 A major benefit of our lower and upper bound definitions, in combination, is to provide an indication
380 of the quality of the approximate solution. The global optimal solution falls between the lower bound
381 of the root and the upper bound of the candidate solution, and the cost of our approximate solution
382 also falls between these bounds. Thus, the error between the optimal solution and our approximation
383 can be no more than the difference between these upper and lower bounds. In practice, the benefit is
384 that this difference can be used to determine by how much a solution could potentially improve if the
385 BnB algorithm were allowed to continue its computation.

386 5.3. *Branching*

387 The other main component of the BnB algorithm is the *branching* step. Branching is the process by
388 which a partition of the search space represented by a node is further partitioned. Branching considers
389 two cases: 1) a partition can contain a solution that has potential to reduce cost if expanded, and 2)
390 there is no possible way to reduce the cost further. A region of the search space can contain a solution
391 with lower final cost when the lower bound is strictly less than the current best upper bound found
392 so far. Functionally this means that there may exist a full schedule, based on this partial schedule,
393 that has a lower cost. Alternatively if the lower bound is strictly greater than or equal to the current
394 best upper bound, the solution can be safely deleted or *pruned*, as there is no possible schedule in that
395 partition that will reduce the cost further.

396 The branching step is outlined in pseudocode as Algorithm 3. Branching expands partial solutions
397 by creating child or branch nodes that represent all the next possible valid refill stops. The effect of
398 branching is to incrementally extend the given partial schedule. We compute the set of child nodes as
399 follows. We first step along each robot’s path and build a list of all stops that are reachable without
400 requiring a refill. Secondly we create a child node for each combination of reachable stops from the
401 resulting lists.

402 The rate at which the cost converges to optimal can be improved by using additional pruning rules,

Algorithm 1 Branch and Bound (BnB) for fill scheduling with queuing

Precondition: k : number of robots, G : graph of field plot, T_d : resource capacity, T_r : resource refill time, $compTime$: computation time budget, n : cardinality of robot graph segments

```
1: function BNB( $k, G, T_d, T_r$ )
2:   root  $\leftarrow$  InitialiseTree()
3:   optCost  $\leftarrow$  CalculateLowerBound(root, 0,  $G, k$ )     $\triangleright$  Lower bound of root is global optimum
4:   bestUpperBound, candidatePath  $\leftarrow$  CalculateUpperBound(root)
5:   unexplored  $\leftarrow$  AddChildren(root,  $T_d, T_r, k, n$ )     $\triangleright$  unexplored is a stack
6:   startTime, currTime  $\leftarrow$  GetSystemTime()
7:   while Length(unexplored) > 0 and  $compTime - (startTime - currTime) > 0$  do
8:     currTime  $\leftarrow$  GetSystemTime()
9:     node  $\leftarrow$  unexplored.pop()
10:    nodeCost  $\leftarrow$   $\sum_{j=1}^k (coverageCost(j) + refillCost(j)) + queuing(node)$ 
11:    lowerBound, lowerPaths  $\leftarrow$  CalculateLowerBound(node, nodeCost,  $G, k$ )     $\triangleright$  Lower bound
12:    if lowerBound  $\leq$  bestUpperBound then     $\triangleright$  Branch
13:      upperBound, upperPath  $\leftarrow$  CalculateUpperBound(node, lowerPaths)  $\triangleright$  Upper bound
14:      if upperBound  $\leq$  bestUpperBound then
15:        BestUpperBound, candidatePath  $\leftarrow$  UpperBound, UpperPath
16:      end if
17:      children  $\leftarrow$  addChildren(node,  $T_d, T_r, k, n$ )
18:      unexplored  $\leftarrow$  children
19:    else
20:      Prune(node)     $\triangleright$  prune sub tree
21:    end if
22:  end while
23:  approxRatio  $\leftarrow$   $\frac{bestUpperBound - optCost}{optCost}$ 
24:  return bestUpperBound, candidatePath, approxRatio
25: end function
```

Algorithm 2 Calculating bounds for a BnB node

```
1: function CALCULATELOWERBOUND(node, nodeCost, G, k)
2:   lowerPaths  $\leftarrow$  []
3:   costs  $\leftarrow$  []
4:   for j  $\leftarrow$  1 to k do
5:     lowerPaths[j], costs[j]  $\leftarrow$  SingleRobotDP(node, G, j)
6:   end for
7:   lowerBound  $\leftarrow$  nodeCost +  $\sum_{j=1}^k$  costs[j]
8:   return lowerBound, lowerPaths
9: end function
10: function CALCULATEUPPERBOUND(nodeCost, lowerBoundPaths)
11:   upperPath  $\leftarrow$  makeJointPath(lowerBoundPaths)
12:   lowerBound  $\leftarrow$  nodeCost + CalculateCostOfPath(upperPath)
13:   return upperBound, UpperPath
14: end function
```

Algorithm 3 Adding childBnB node

```
1: function ADDCHILDREN(node, Td, Tr, k, n)
2:   children  $\leftarrow$  []
3:   reachable  $\leftarrow$  []
4:   for j  $\leftarrow$  1 to k do
5:     for i  $\leftarrow$  nodeij to n do
6:       if  $T_d \geq T_r \cdot (1 - \text{resourceUse}(\text{node}_i^j, v_i^j))$  then ▷ reachable refill stops
7:         reachable[j]  $\leftarrow$  vij
8:       end if
9:     end for
10:  end for
11:  for b  $\in C(\text{reachable}, k)$  do ▷ combinations of reachable vertices for k robots
12:    children  $\leftarrow$  b
13:    node.children  $\leftarrow$  b
14:  end for
15:  return children
16: end function
```

403 which are possible due our formulation of the bounds. Additional pruning can be performed if the
404 upper and lower bounds of a node are equal; there is no further benefit that can be found by branching
405 on this solution. If the bounds are not equal, there still may be an opportunity to prune. For a given
406 node b , we can use the upper and lower bounds to infer if queuing occurs in the unexpanded section of
407 the partial schedule. In other words, if UB_b minus the cost of P_b is equal to OPT_b , then no queuing
408 occurs in the optimal expansion of the schedule and it can be pruned safely.

409 The convergence rate can also be increased heuristically by exploring high-quality candidate branches
410 first. High-quality candidates are schedules that do not deviate far from the lower bound schedule,
411 measured by the path distance between the next chosen refill stop and the lower bound schedule.
412 Recall that the cost function is a sum of refilling and queuing costs. Deviating from the lower bound
413 schedule will incur an increase in refilling path cost, and the total cost will be reduced only if there
414 is an equal or greater reduction in queuing cost. Due to this property our algorithm first evaluates
415 branch nodes that lie within some deviation from the next optimal stop given by the lower bound
416 schedule computed from the parent node. Otherwise, the algorithm evaluates potential improvements
417 ordered by greatest amount of resource usage.

418 6. Experiments and Results

419 In this section we report experimental results in simulation that validate the behaviour of our
420 algorithms and evaluate their performance. We explain our experimental setup, present results for
421 both algorithms, and conclude with a sensitivity analysis that shows that our algorithm is reasonably
422 robust to errors in estimation of spray rate.

423 6.1. Experimental Setup

424 To validate the performance of our algorithms, we perform extensive experiments in simulation.
425 Here, simulation requires *modelling* (creating digital versions of) both the environment and the robots.
426 Our simulated environments consist of five field plots, based on real-world field plot geometry and
427 given refill station locations, from a farm in Queensland, Australia. The five field plots span an area
428 of roughly 1000 hectares in total; these field plots are shown in Fig. 3.

429 Coverage paths input to our algorithm can be generated by any coverage algorithm. Here we simply
430 generated a *boustrophedon* or “lawnmower”-style path in the tradition of Choset et al. (2005). This
431 path (G) was partitioned into approximately equi-distance segments (V^j) and allocated to the robots.
432 Example coverage paths for three of the field plots are shown in Fig. 4. The coverage paths were
433 generated for ten robots at eight-meter row spacing.

434 For the simulated robot models, we assume that robots are performing weed control using sprayed
435 herbicide or slurry spreading and that fuel is not a limiting factor. We thus ignore fuel and consider

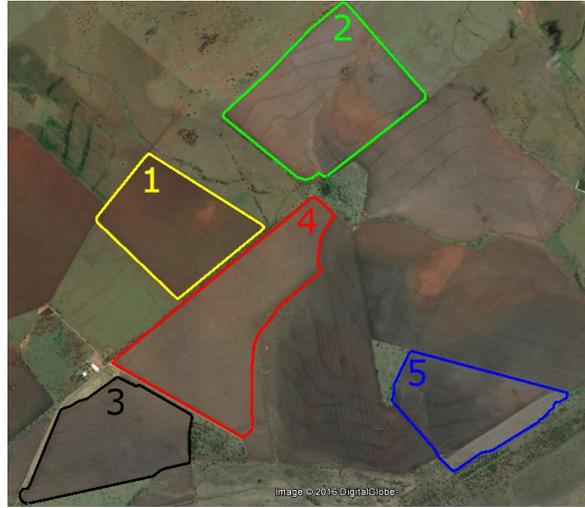


Figure 3: Overhead view of the field plots, in which the geometry and their relative sizes can be seen. Each field plot is assigned a number and colour: 1) yellow, 2) green, 3) black, 4) red, 5) blue.

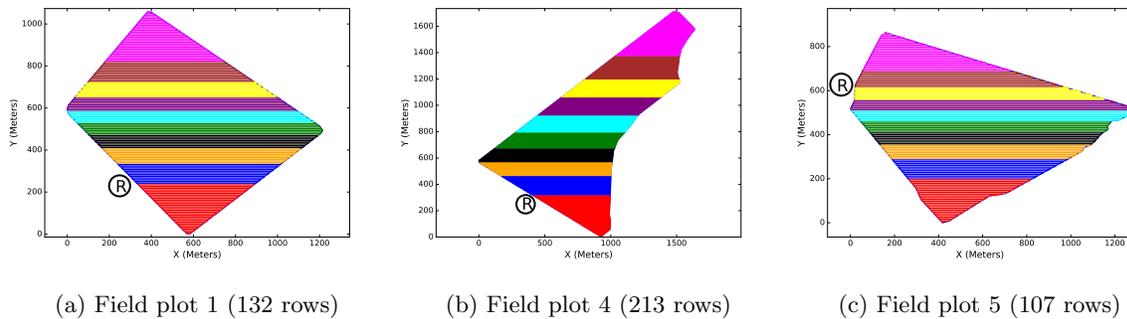


Figure 4: Example coverage paths for 10 spot spraying robots at eight-meter row spacing. The refill station is shown as the R inside a circle, and each robot path is shown as a different colour. Allocating equal length paths results in varying numbers of rows for each robot, which can be seen as the varying sizes of the path segments in the y dimension.

436 three operational cases: 1) spot spraying 2) broadcast spraying and 3) slurry application. Spot spraying
 437 is typified by small resource tank capacity and low usage rate. Broadcast spraying requires large tank
 438 capacity and uses resources at a higher rate. Slurry application is a bulk process and requires very
 439 large tank capacities and uses resources at a rapid rate. For the spot spraying robot model we base
 440 the parameters on a multi-robot system that is operating commercially in agriculture (Swarmfarm
 441 Robotics). To model the broadcast case we assume a commercially available boom sprayer, such as
 442 the Pegasus 6000 (Pegasus Boomsprays), with high-flow spray nozzles and a high-flow refill pump.
 443 The slurry spreading robot model is based on a commercial slurry spreader such as the Vredo VT
 444 4556 (Vredo VT 4556). The parameters of the robot models are given in Tab. 1. To model spraying
 445 we chose to calculate a constant usage rate per linear meter traveled based on the area covered per

Parameter	Spot spray	Broadcast	Slurry application	units
Resource Tank capacity T_d	400	6000	16000	Litres
Area covered per tank	20	75	1	Hectares
Travel speed	8	15	20	Km/h
Tank refill time T_r	6	10	10	Minutes
Row Spacing	8	36	20	Meters
Maximum effective team size k_{max}	33	10	2	Robots

Table 1: Robot model parameters

446 tank and the row spacing (and hence robot width). Spraying material is assumed to be used at this
447 rate for both spraying cases regardless of the number or presence of weeds. The slurry application rate
448 is also assumed to be constant.

449 Further, we assume the following: the robots are homogeneous, there are no collisions during travel,
450 resources are used at a constant rate, the resource application rate is known accurately, and robots
451 travel at a constant velocity. The strongest of these assumptions is that the resource application rate
452 for spot spraying is known accurately. We investigate the practical effects of this assumption later in
453 Sec. 6.4, and establish that algorithm performance is acceptable given reasonable inaccuracy in the
454 resource application rate estimate.

455 In spot spraying and broadcast spraying, the graph vertices (potential stopping points) are located
456 at the ends of each row of the field plot. Travel to/from the refill station is restricted to the road
457 network to avoid unnecessary row traversal and limit soil compaction.

458 The slurry application required denser placement of potential stopping points to allow for the high
459 rate of resource usage; it may not be possible to traverse a single row without refilling. Therefore,
460 vertices were added along the rows at 250-meter intervals.

461 The hardware used to perform the experimental evaluation is a desktop computer with an i7-6700
462 CPU and 32 Gb system memory, running a 64-bit Ubuntu 15.10 operating system. The software was
463 written in 64-bit Python 2.7.

464 6.2. Experiments with the Exact Algorithm

465 To analyse the dynamic programming formulation given in Sec. 4, we compare its results with
466 those of a naive distance-based greedy heuristic approach. A greedy algorithm was selected because
467 it produces valid schedules and is an intuitive, simple solution to the problem. The greedy algorithm
468 represents the scenario where each robot drives until its resource tank is empty and does not consider
469 refilling costs or the effects of queuing. This is the typical approach used in current practice.

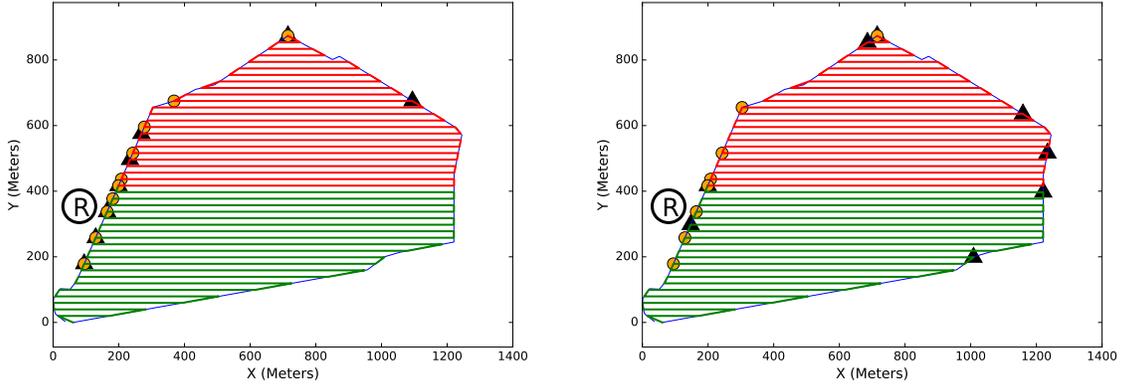


Figure 5: Example sub-optimal and unstable refilling choices of the greedy algorithm. A slight perturbation in the problem instance (in this case robot tank capacity) can negatively impact the algorithm’s performance. This impact can be arbitrarily bad as it depends on the refill travel distance, queuing costs and the number of robots. The refill station is shown as the R inside a circle, and each robot path is shown as a different colour. The DP solution is shown as circles and greedy as triangles.

470 The greedy algorithm was found to produce sub-optimal results with highly variable quality. This
 471 variability is highlighted in Fig. 5, where a small perturbation in spray rate affected the greedy solution
 472 cost by over 10%. This figure also demonstrates a cause of the sub-optimality; the greedy algorithm
 473 can choose a number of refills far away from the refill station and incurs a high cost for those refills
 474 in contrast to the DP algorithm, which tends to refill closer to the refill station. For some problems
 475 the optimal solution can require a long travel distance to avoid queuing, but since the greedy solution
 476 does not consider these effects, its results can be arbitrarily poor.

477 The DP formulation was capable of solving the problem optimally for small problem instances. DP
 478 was found to be impractical for problems with more than 10-20 rows and 4 robots due to excessive
 479 system memory and computation time requirements. The exponential growth in computation time
 480 limits the practicality of the DP approach to small instances such as those with 2-3 robots and under
 481 50 rows. Average computation times and solution quality is given in Tab. 2. Intuitively, it would seem
 482 that the DP algorithm should be capable of dealing with larger problem instances, because not all stops
 483 are reachable from each other. This sparse reachability means that not every possible permutation of
 484 refill stops needs to be computed. A smaller search space would imply that the running time would be
 485 favourable, compared to the worst case complexity bounds. In practice this effect is dominated by the
 486 combinatorial explosion of the search space due to the number of robots. This domination can be seen
 487 by observing in Tab. 2 that the running time is more strongly affected by an increase in the number of
 488 robots compared to an increase in the number of rows.

Number of robots	20 rows		30 rows	
	Greedy	DP	Greedy	DP
1	0.000053	0.00087	0.000045	0.0092
2	0.0003	0.034	0.00079	0.15
3	0.00081	383.95	0.0031	962.1
4	0.0023	1043.2	0.004	4278.3

Table 2: The computation time (in seconds) of the greedy and dynamic programming algorithms on field plot 3. The greedy algorithm completes in polynomial time, compared to the DP algorithm which runs in exponential time. The addition of robots has a stronger effect on computation time than the addition of rows.

6.3. Experiments with the Branch and Bound Algorithm

For the following set of experiments our BnB algorithm was given a computation time budget of one second. The approximation quality may be improved with longer computation time, but these results still demonstrate that even with short computation time our approach is effective. Later in the section we investigate the effect of computation time on BnB approximation quality.

The colours used in the figures in this section correspond to the field plots as shown in Fig. 3. The approximation factor is calculated as the ratio of the slack between the upper and lower bounds scaled by the lower bound. Formally, the approximation factor is $(UB - LB)/LB$.

For spot spraying robots our BnB algorithm achieves a near-optimal result. The quality of these results is shown in Fig. 6a. For all experiments the solution cost is within 35 percent of optimal (6 percent on average), and achieves a 4-40 percent reduction in cost compared to greedy (13 percent on average), even for the worst performing field plot. Interestingly, the algorithm continued to produce high quality results for a fixed computation budget, despite the growth in number of robots.

For the broadcast spraying case, our algorithm achieves performance increases over greedy, as shown in Fig. 6b. In all experiments the solution cost is within 80 percent of optimal (29 percent on average), and achieves a 6-50 percent reduction in cost compared to greedy (22 percent on average).

Results for the slurry application are shown in Fig. 7a. The effect of queueing is severe because the system requires a large number of refills. The performance of our algorithm approaches that of the greedy approach because the frequent refills severely restrict the number of potential waypoint selections. Multiple refill stations may be necessary to reduce queueing in this class of problem instances.

To understand how system throughput scales with additional robots, we measured work time (the maximum single-robot cost) for teams of varying size. Increasing the number of robots led to

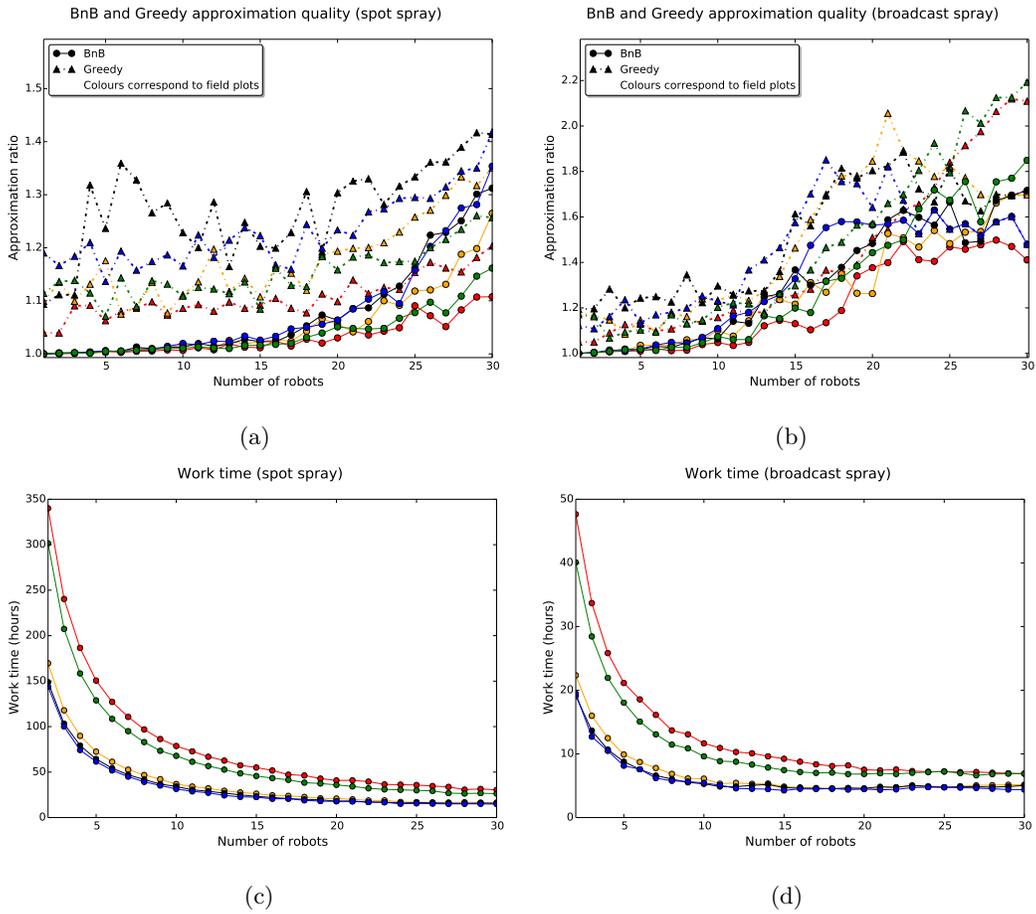


Figure 6: (a) shows that the BnB algorithm produces an average approximation ratio of 1.06 for a team of spot spraying robots. (b) shows that the BnB algorithm produces an average approximation ratio of 1.28 for a team of broadcast spraying robots. (c) shows how the number of robots affects the work time for a team of spot spraying robots. (d) shows how the number of robots affects the work time for a team of broadcast spraying robots. Work time is defined as the maximum single-robot cost, which indicates the completion time of the entire robot team.

511 diminishing benefits for all three system types: spot spraying shown in Fig. 6c, broadcast spraying
 512 shown in Fig. 6d, and slurry application shown in Fig. 7b. This effect is due to the increase in time
 513 spent queuing and is expected; in Sec. 3.2 we proved that there is a limit on the maximum number of
 514 robots that can work together effectively, and therefore the benefit of adding robots eventually reaches
 515 zero.

516 To understand how the algorithms can affect the performance of real world systems we use the
 517 measure of effective field efficiency. We calculate the effective field efficiency as the mean field efficiency
 518 for boom spraying systems given in ASAE D497.7 (2011) divided by the average approximation ratio.
 519 An approximation ratio of 1 means the system performs optimally and would result in the ideal effective
 520 efficiency. Larger approximation ratios mean the system result in lower efficiency due to more than

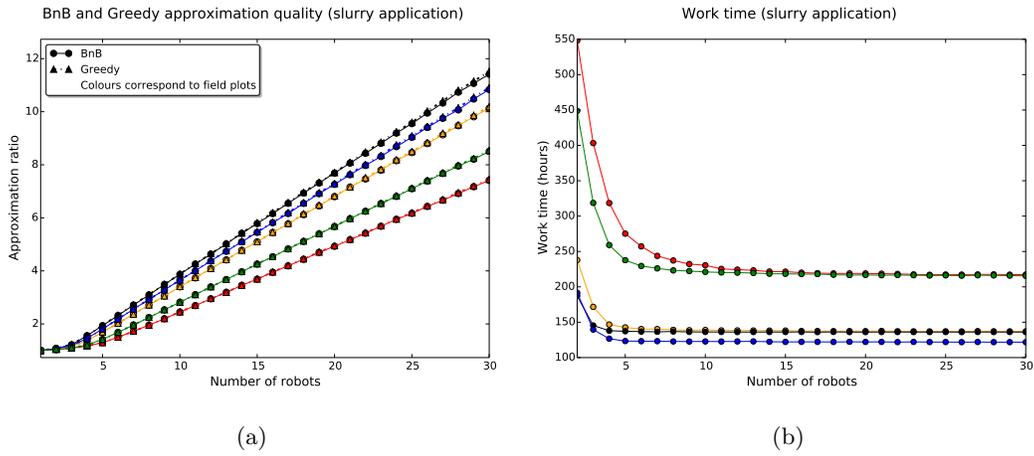


Figure 7: Effects of number of robots on slurry application scenarios. Both the BnB and greedy algorithms perform poorly in this scenario. The approximation ratio is large due to the large amount of queuing.

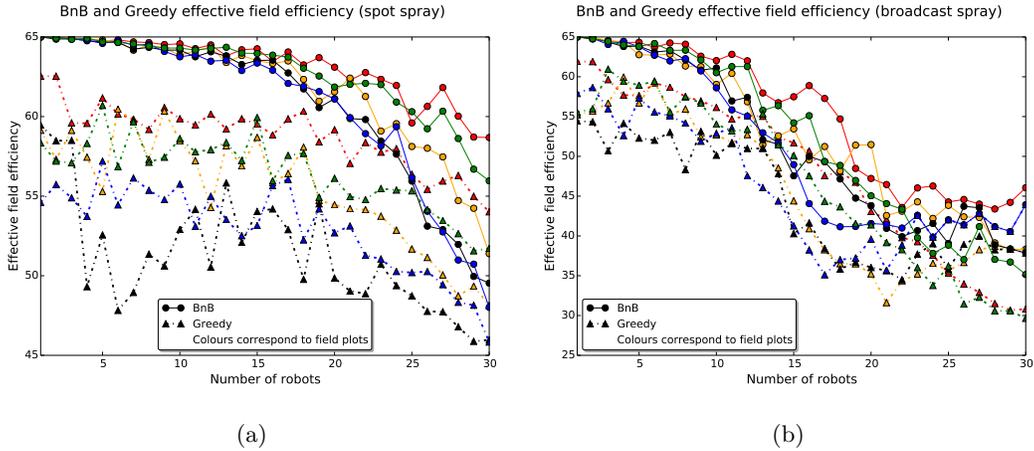


Figure 8: Effects of number of robots on effective field efficiency. Out of a best case of 65% field efficiency, our BnB algorithm achieves an average effective field efficiency of 61.6% for spot spraying and 50.4% for broadcast spraying.

521 the ideal amount of time spent refilling or queuing. For spot spraying systems, shown in Fig. 8a, our
 522 BnB algorithm has an average effective field efficiency of 61.6%, compared to 54.7% for the greedy
 523 algorithm, resulting in an improvement of 6.9% in effective field efficiency over the greedy approach.
 524 Similarly, for broadcast spraying systems, shown in Fig. 8b, the average effective efficiency is 50.4% for
 525 the BnB algorithm compared to 44.2% for greedy, an improvement of 6.2% in effective field efficiency
 526 over the greedy approach. For slurry applications our algorithm performed the same as the greedy
 527 approach hence there is no change in field efficiency between the two algorithms.

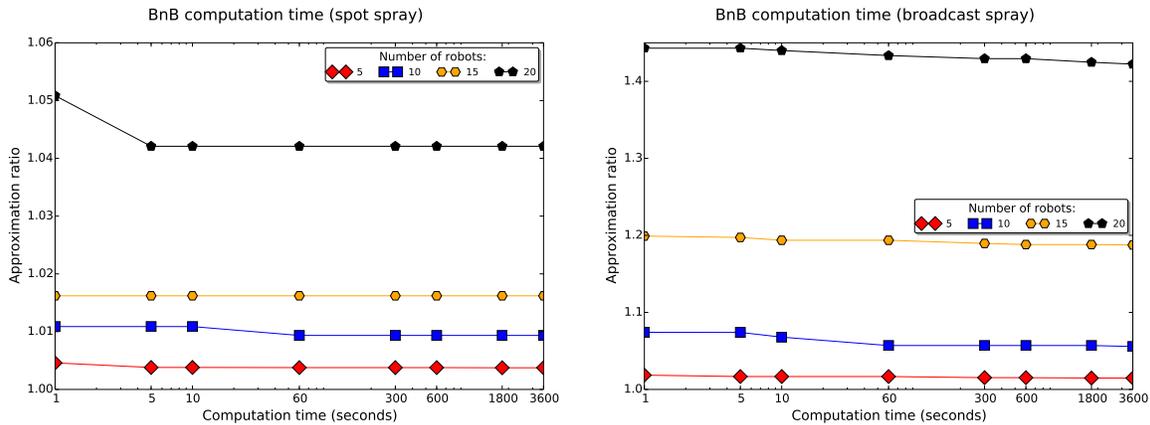


Figure 9: Effect of increasing computation time on BnB approximation. Additional computation time non-linearly improves the approximation ratio. Improvement is slow because the search space is large and the algorithm has to find solutions that reduce queuing costs without increasing travel costs.

528 6.3.1. Effect of Computation Time

529 To examine the effect of the BnB computation time on solution quality, we allowed the algorithm
 530 to run for increasing lengths of time and observed the approximation quality. These computation
 531 time experiments are run on field plot 2. Slurry application systems exhibited a lack of flexibility in
 532 schedule selection, hence we focus our analysis on spot spraying and broadcast systems where there is
 533 more opportunity for further schedule optimisation.

534 Additional computation time improves the approximation in a non-linear fashion. It can be seen in
 535 Fig. 9 that for most scenarios, with additional computation, the BnB algorithm improves the approx-
 536 imation ratio and produces lower cost schedules. The improvements generally increase in magnitude
 537 as the number of robots increases, because the effect of queuing becomes more exaggerated, and there
 538 is more potential for small changes to have a cascade effect (one robot forces another to queue, which
 539 causes more queuing, and so on). However, a larger number of robots also results in an exponentially
 540 larger search space so improvements can take significantly longer to find.

541 6.4. Sensitivity Analysis

542 One potential limitation of our work is that it can be difficult to predict spray rate, and thus
 543 it is important to understand how our algorithms break down when faced with errors in spray rate
 544 estimation. Broadcast spraying typically involves a constant chemical application rate target, but
 545 the spot spraying case is more challenging. Unlike broadcast, it is difficult to accurately estimate
 546 the amount of liquid applied per unit area because it is variable. One such example would be field
 547 plots with higher weed density than expected (underestimating the usage rate), or lower weed density
 548 (overestimating the usage rate).

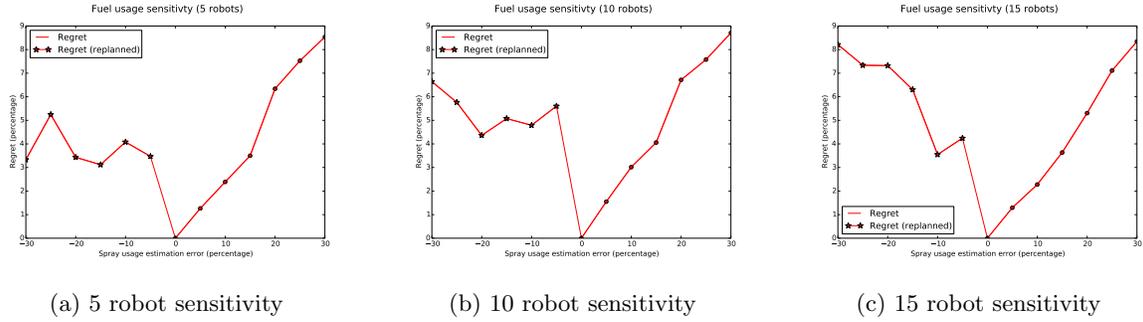


Figure 10: Regret caused by incorrectly estimating resource usage rate for 5, 10, 15 robots (field plot 4).

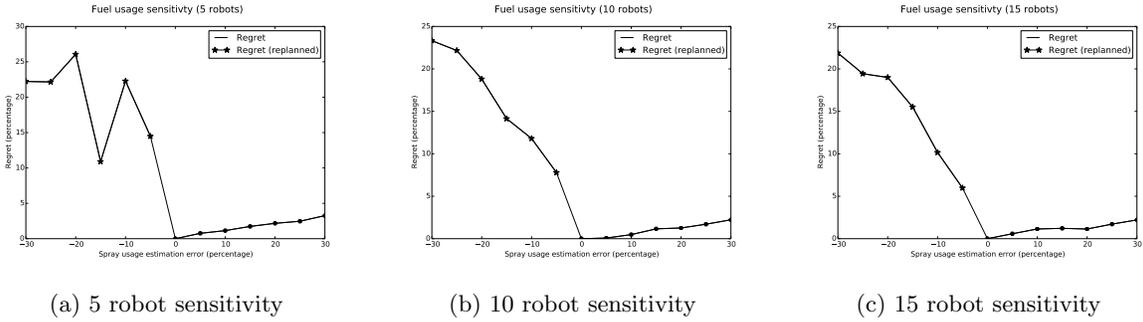


Figure 11: Regret caused by incorrectly estimating resource usage rate for 5, 10, 15 robots (field plot 3). Overestimation has a lower regret than underestimation which provides insight about how to estimate usage rates when considering uncertainty.

549 To analyse the potential operational impact of this assumption, we investigate the sensitivity of
 550 the schedule to the estimation error of the spray usage rate. We measure this sensitivity using *regret*.
 551 In this case regret is defined as the extra cost incurred due to error in estimating the spray rate, either
 552 by: 1) overestimation causing a sub-optimal schedule, or 2) underestimation invalidating schedules
 553 and requiring replanning to fix. Formally, to calculate regret, let the spray rate estimation error Δ
 554 be the difference between the estimated spray rate and the actual spray rate. Let E_0 be the cost of a
 555 schedule using the estimated (expected) spray rate and let I_Δ be the ideal cost of a schedule using the
 556 real spray rate calculated as if there is no estimation error. These ideal and estimated costs are given
 557 by the lower bound of the BnB root, which allows us to bound the regret and account for variability
 558 in feasible solution costs (due to approximation).

Let A_Δ be the cost of a schedule that was computed using an estimated spray rate, but evaluated using the actual spray rate. If the schedule remains valid, this cost is equivalent to the BnB solution's upper bound. If the schedule is no longer valid, due to exhausting the spray resource earlier than estimated, it needs to be modified. Schedules are modified using a reactive greedy strategy. This strategy chooses to refill at the last possible stop before the spray resource is exhausted, resulting in

a valid schedule. Let the offset from 0 be $\delta = \frac{A_0 - I_0}{E_s} \times 100$. Regret for a given estimation error Δ as a percentage of the estimated schedule cost is then calculated as:

$$\left(\frac{A_\Delta - I_\Delta}{E_0} \times 100 \right) - \delta.$$

559 It can be seen from Fig. 11 and Fig. 10 that the solution is far more sensitive to underestimation
 560 than to overestimation. The reactive greedy strategy can lead to large regret, because the new schedules
 561 have higher refill counts and sub-optimal refill stop selections. Overestimation can quickly invalidate
 562 schedules, because the schedules tend to minimise the number of refills and hence maximise the amount
 563 of resource used. Alternatively the system seems fairly robust to overestimation, because the schedules
 564 are still valid. Schedules with overestimation still have some associated regret because they refill more
 565 frequently than necessary.

566 This sensitivity analysis suggests guidelines to be used by practitioners. Any inaccuracy in esti-
 567 mation sacrifices optimality, but overestimation is preferable to underestimation and the algorithm is
 568 not particularly sensitive to the magnitude of overestimation. Results for underestimation are unpre-
 569 dictable and may lead to large variance in run time (biased towards larger run times), because the
 570 algorithm behaviour is forced to be reactive, which devolves into a greedy replanning strategy. This
 571 analysis supports the use of our algorithm in practice because, with reasonably accurate rate estima-
 572 tion (up to 30% error underestimation and 5% overestimation error), even in the unfavorable scenarios
 573 our algorithm outperforms (or devolves to) a reactive greedy approach.

574 7. Discussion

575 In this section we discuss the practical implications of our work. We discuss the effect of reducing
 576 travel and queuing time for practical systems, capability to inform choice of robot team size, perfor-
 577 mance in spot spraying versus broadcast spraying, alternative spray tank finishing capacity constraints,
 578 the potential for using our algorithm to position the refill station, and future work.

579 The problem analysis and solutions presented here have strong potential to be useful in practice.
 580 The refill scheduling problem affects both teams of traditional vehicles and multi-robot systems in a
 581 breadth of circumstances including spraying, cargo delivery, and other tasks that involve replenishing
 582 resources at a shared location. Improving their refilling efficiency has appreciable positive benefits.
 583 The spraying operations (in this work) improve the field efficiency, by 6.9% for spot spraying and
 584 6.2% for broadcast spraying, compared to the typical approach. Reducing the refilling costs allows
 585 the robots to spend less time transiting to/from the refill station and queuing, thus improving system
 586 throughput and the amount of fuel used. Both benefits result in lower operational costs and improve
 587 the environmental impact of spraying systems.

588 Another practical outcome of this work is that it informs the choice of *how many* robots to use for
589 a given scenario. Our results show that, in practice, as the size of the robot team grows the queuing
590 cost starts to dominate the benefit of increasing the robot team size, and the throughput is limited.
591 Hence, there is an ideal number of robots that should be deployed for a given problem, due to a growth
592 in associated operational overhead and a reduction in marginal utility (due to queuing costs). Our
593 algorithm makes it possible to easily explore the expected performance of teams of various sizes, and
594 potentially can be used as an operational design tool.

595 A useful benefit of our approach is that it can be used to understand the scalability of multi-robot
596 broadcast and spot spraying systems. The results show that the marginal benefit of adding more robots
597 to a broadcast spraying system is less than that of spot spraying system. The reason is that broadcast
598 systems have a lower work time/refill time ratio. A low ratio leads to sizable queuing periods, and
599 this effect is worsened by the addition of more robots. The implication for broadcast systems is that
600 adding more robots requires either a higher work/refill time ratio or additional refill stations.

601 Another area for consideration when applying our work is the amount of spraying material a robot
602 should have left in the tank at the end of an operation. This requirement is dependent on the particular
603 operation required. For our problem formulation we defined for the robot to finish with a full tank,
604 such as would occur in a contract spraying scenario. Contract operators may often want the system
605 to end with a full tank, in order to know exactly how much chemical was used (which is billed to the
606 client). The robots start and end full, and then the amounts added at each refill (measured at the
607 pump) is summed to compute the total chemical bill. Alternatively, there can be operations that would
608 prefer the system to finish empty or with an arbitrary capacity. A scenario that motivates finishing
609 with an arbitrary tank capacity is an operation where the spray tanks need to be flushed and the
610 chemicals changed between field plots. To handle the arbitrary finishing tank capacity our problem
611 formulation needs to be modified slightly. The problem needs to be constructed such that $r_n^j = 0$ and
612 $f(i, n) = 0$ this means the final refill will have no time cost and is effectively ignored, thus allowing the
613 system to finish with an arbitrary resource amount. Subsequently, there needs to be a separate check
614 to ensure that the resource used to reach the final vertex does not exceed the tank capacity constraint,
615 since the cost is set to 0. These modifications would allow the system to handle different operational
616 realities.

617 Lastly, our approach can be used to inform the choice of where to place the refill station. It is
618 sufficient to run the algorithm iteratively for various placements and choose the best result. This
619 process is feasible because the algorithm is anytime and offers reasonable approximation quality. More
620 interestingly, with a straightforward extension to the algorithm this process can also be used to consider
621 placement of more than one refill station. A simple scenario is one fixed station plus one mobile station
622 that can be towed into a chosen position. Adding further refill stations can reduce travel and queuing

623 time, but also increases the complexity of the decision problem exponentially.

624 Multi-robot refill scheduling is a rich problem area with many important avenues of future work.
625 Problem variants that could lead to reduced work time include those that consider multiple refill
626 stations, mobile refill stations, and partial refilling. It would also be interesting to understand the
627 effects of different coverage patterns (such as row interleaving) on travel/queuing time. Promising
628 approaches to improve stability include probabilistic methods that deal with uncertainty in spray rate
629 estimation, and replanning.

630 Areas for future improvement that instead focus on improving practicality include parallelising
631 the algorithm, and producing a cloud based service. Our work focused on the characterisation of the
632 problem and design of the approach, not the optimisation of the implementation. The design of our
633 BnB algorithm lends itself to a parallelised approach, which would lead to speed increases proportional
634 to the amount of hardware used. Lastly, establishing a cloud based service would allow agricultural
635 system operators to more easily access the benefits of our results and promote wider adoption.

636 8. Conclusion

637 In this work, we characterised and provided solutions for the multi-robot refill scheduling problem
638 with queuing. We defined the problem by constructing a subset selection problem with a non-linear
639 cost metric. Also we proved that the problem is NP-hard and that there is a bound on the number
640 of robots that can work effectively. We designed an algorithm based on dynamic programming that is
641 capable of solving the problem optimally, but due to exponential complexity its practicality is limited
642 to small problem instances. Realistic instances can be solved quickly and approximately using our
643 anytime branch and bound algorithm. This anytime property allows BnB algorithm to be terminated
644 at any time and to provided a feasible and valid solution for the problem, which is important for
645 real-time systems. Another benefit is the bounds of the BnB algorithm provide information about
646 the approximation quality and were designed to be computed in polynomial time. We tested our
647 BnB algorithm on a range of simulated of real world agricultural applications, from small dose rate
648 spot spraying to high dose rate slurry application and the results show functionality and applicability
649 of the algorithm for the full range of agricultural operations. We also show empirically that our
650 BnB algorithm produces quality approximately optimal solutions and out performs the typical greedy
651 approach used in practice. The strongest assumption made by our algorithm is that the usage rate
652 is known. It is difficult to accurately estimate the spray rate for spot spraying, but our sensitivity
653 analysis showed that our algorithm’s performance is reasonably robust to inaccurate estimates.

654 ASAE D497.7, 2011. Agricultural Machinery Management Data. ASABE American Society of Agri-
655 cultural and Biological Engineers. St. Joseph, MI 49085-9659 USA.

- 656 Best, G., Fitch, R., 2016. Probabilistic maximum set cover with path constraints for informative path
657 planning, in: Proc. of ARAA Australasian Conference on Robotics and Automation.
- 658 Binney, J., Sukhatme, G.S., 2012. Branch and bound for informative path planning, in: Proc. of IEEE
659 International Conference on Robotics and Automation, pp. 2147–2154.
- 660 Bochtis, D.D., Sorensen, C.G., 2009. The vehicle routing problem in field logistics part I. Biosystems
661 Engineering 104, 447–457.
- 662 Bochtis, D.D., Sorensen, C.G., 2010. The vehicle routing problem in field logistics: Part II. Biosystems
663 Engineering 105, 180 – 188.
- 664 Bruglieri, M., Pezzella, F., Pisacane, O., Suraci, S., 2015. A variable neighborhood search branching for
665 the electric vehicle routing problem with time windows. Electronic Notes in Discrete Mathematics
666 47, 221–228.
- 667 Chen, B., Potts, C.N., Woeginger, G.J., 1998. A review of machine scheduling: Complexity, algorithms
668 and approximability, in: Handbook of combinatorial optimization. Springer, pp. 1493–1641.
- 669 Choset, H., Lynch, K.M., Hutchinson, S., Kantor, G.A., Burgard, W., Kavraki, L.E., Thrun, S., 2005.
670 Principles of Robot Motion: Theory, Algorithms, and Implementations. MIT Press, Cambridge,
671 MA.
- 672 Cormen, T.H., Leiserson, C.E., Rivest, R.L., Stein, C., 2001. Introduction to algorithms. MIT press
673 Cambridge.
- 674 Edwards, G., Jensen, M.A.F., Bochtis, D.D., 2015. Coverage planning for capacitated field opera-
675 tions under spatial variability. International Journal of Sustainable Agricultural Management and
676 Informatics 1, 120–129.
- 677 Galceran, E., Carreras, M., 2013. A survey on coverage path planning for robotics. Robotics and
678 Autonomous Systems 61, 1258–1276.
- 679 Hameed, I.A., 2014. Intelligent coverage path planning for agricultural robots and autonomous ma-
680 chines on three-dimensional terrain. Journal of Intelligent & Robotic Systems 74, 965–983.
- 681 Jensen, M.F., Bochtis, D., Sorensen, C.G., 2015a. Coverage planning for capacitated field operations,
682 part II: Optimisation. Biosystems Engineering 139, 149 – 164.
- 683 Jensen, M.F., Norremark, M., Busato, P., Sorensen, C.G., Bochtis, D., 2015b. Coverage planning for
684 capacitated field operations, part I: Task decomposition. Biosystems Engineering 139, 136 – 148.

685 Jin, J., Tang, L., 2011. Coverage path planning on three-dimensional terrain for arable farming.
686 *Journal of Field Robotics* 28, 424–440.

687 Keil, J.M., 1992. On the complexity of scheduling tasks with discrete starting times. *Operations*
688 *Research Letters* 12, 293–295.

689 Keskin, M., Catay, B., 2016. Partial recharge strategies for the electric vehicle routing problem with
690 time windows. *Transportation Research Part C: Emerging Technologies* 65, 111–127.

691 Leung, J.Y., 2004. *Handbook of scheduling: algorithms, models, and performance analysis*. CRC
692 Press.

693 Lin, S.H., Gertsch, N., Russell, J.R., 2007. A linear-time algorithm for finding optimal vehicle refueling
694 policies. *Operations Research Letters* 35, 290 – 296.

695 Nam, C., Shell, D.A., 2015. Assignment algorithms for modeling resource contention in multirobot
696 task allocation. *IEEE Transactions on Automation Science and Engineering* 12, 889–900.

697 Oksanen, T., Visala, A., 2009. Coverage path planning algorithms for agricultural field machines.
698 *Journal of Field Robotics* 26, 651–668.

699 Patten, T., Fitch, R., Sukkarieh, S., 2016. Multi-robot coverage planning with resource constraints for
700 horticulture applications, in: *Acta Horticulturae*, pp. 655–662.

701 Pegasus Boomsprays, . <http://croplands.com.au/Products/Trailed-Boomsprays/Pegasus>. Ac-
702 cessed: 2017-04-05.

703 Rekleitis, I., New, A.P., Rankin, E.S., Choset, H., 2008. Efficient boustrophedon multi-robot coverage:
704 an algorithmic approach. *Annals of Mathematics and Artificial Intelligence* 52, 109–142.

705 Richards, D., Patten, T., Fitch, R., Ball, D., Sukkarieh, S., 2015. User interface and coverage planner
706 for agricultural robotics, in: *Proc. of ARAA Australasian Conference on Robotics and Automation*.

707 Schneider, M., Stenger, A., Goeke, D., 2014. The electric vehicle-routing problem with time windows
708 and recharging stations. *Transportation Science* 48, 500–520.

709 Suzuki, Y., 2014. A variable-reduction technique for the fixed-route vehicle-refueling problem. *Com-*
710 *puters & Industrial Engineering* 67, 204–215.

711 Swarmfarm Robotics, . <http://www.swarmfarm.com/>. Accessed: 2017-04-05.

712 Toth, P., Vigo, D., 2002. Models, relaxations and exact approaches for the capacitated vehicle routing
713 problem. *Discrete Applied Mathematics* 123, 487 – 512.

714 Vredo VT 4556, . <https://www.vredo.com/en/products/self-propelled-tracs/vt4556/>. Ac-
715 cessed: 2017-22-05.