



# A ranking scheme for biodiesel underpinned by critical physicochemical properties

S.M.A. Rahman<sup>a,\*</sup>, I.M.R. Fattah<sup>b,\*</sup>, S. Maitra<sup>c</sup>, T.M.I. Mahlia<sup>b</sup>

<sup>a</sup> Biofuel Engine Research Facility, Queensland University of Technology, Brisbane 4000, Australia

<sup>b</sup> School of Information, Systems and Modelling, Faculty of Engineering and IT, University of Technology Sydney, NSW 2007, Australia

<sup>c</sup> Data & BI, Engineering Department, SureCash, Dhaka, Bangladesh

## ARTICLE INFO

### Keywords:

Biodiesel  
Physicochemical properties  
Biodiesel Ranking  
Engine emission  
Engine performance

## ABSTRACT

Diminishing oil reserve, escalating energy dependence, and the environmental impact of fossil fuel utilization has led to research on renewable energy resources with a cleaner carbon footprint. Biofuel, especially biodiesel, has become a feasible substitute for petroleum diesel as it can be directly used in existing transport infrastructure without significant alteration. This paper starts by discussing some critical physicochemical properties and their effect on engine performance and emission. The research then proposes a ranking scheme to select the most suitable biodiesel based on six vital physicochemical properties: density, viscosity, heating value, flash point, cetane number and oxidation stability. The solution developed is independent of supervision, contrary to popular learning algorithms and can operate on the only intelligence whether an attribute is favourable by its higher/lower values. The novelty of the work consists in ensuring that the rarer properties pick up the greater weights and in establishing a simple ranker based on descriptive statistics. This scheme first generates transactions against each biodiesel which helps in association rule mining, which is later used to score/rank the biodiesels. The three phases and their subordinate sub-steps have been carried out using the platforms: Python, R and Tableau, respectively. The study endorses *Brassica juncea*, Cardoon (*Cynara cardunculus*), and poppyseed oil as the most desirable biodiesel feedstocks. On the other hand, cedar, castor and hiptage were ranked as least desirable in the list of 71 feedstocks based on the proposed ranking scheme. The proposed ranking scheme will help decision-makers such to analyze and obtain tailored biodiesel feedstock for their purposes.

## 1. Introduction

Almost all the countries of the world are profoundly dependent on the transport sector for economic growth. It is necessary to reduce the dependence on vulnerable petro-diesel imports to sustain growth. For example, Australia significantly depends on crude oil imports for its transport and energy sector. As a member of the International Energy Agency (IEA) as well as an oil importer, Australia is required to abide by the IEA program treaty which dictates “to hold oil stocks equivalent to at least 90 days of their prior year’s daily net oil imports”, a benchmark which was set in 1974 [1]. However, since March 2012, Australia has been in non-compliance with the 90-day stockholding obligation [2,3]. In February 2020, Australia only had 81-days worth of oil reserve [4]. The global pandemic created by COVID-19 brought down international transportation due to restrictions put by various countries all over the world which limited the export loads, and extra port operation delays

exposing the country’s vulnerability of over-dependence on liquid fuel of other countries.

On the other hand, this pandemic also delineated the importance of a healthy environment with less air pollution for the betterment of human life [5]. Ambient air pollutants are risk factors for respiratory infection as the microorganisms carried by these are highly invasive to humans which affects the body’s immune system making people more susceptible to pathogens [6]. A recent study has found a significant connection between the mortality rate of COVID-19 patients and long term air pollution- higher levels of the small particles in the air (PM<sub>2.5</sub>) were associated with higher COVID-19 related death rates [7]. Another study by Mofijur *et al.* [8] reported similar findings that the Air Quality Index (AQI) had a strong influence on the cumulative cases of COVID-19 in Dhaka city.

Vehicle emissions are one of the significant sources of air pollution globally. It is reported that vehicle emissions account for 65% of urban

\* Corresponding authors.

E-mail addresses: [s2.rahman@qut.edu.au](mailto:s2.rahman@qut.edu.au) (S.M.A. Rahman), [rizwanul.buet@gmail.com](mailto:rizwanul.buet@gmail.com) (I.M.R. Fattah).

air pollution and compared to road accident fatalities, Australia has higher air pollution death tolls [9]. There are strict emission regulations imposed on a global basis to reduce transport-related to greenhouse gas emissions. Depending on the vehicle technology, emissions include fine particulate matter (PM) which consists of black carbon (BC) and sub-micron primary organic aerosol (POA), and reactive gases. An example of reactive gases is nitrogen oxides (NOx) [10]. NOx emission is associated with ozone (O<sub>3</sub>) formation. Fine PM, NOx emitted from combustion processes severely affect human health. Fine PM can damage lung tissues and the brain by penetrating deep into the human body [11–13]. Thus, it is vital to find alternative fuel sources readily available to fuel the transport and energy sector.

Biodiesel is one of the potential alternative liquid fuels, which is readily available, eco-friendly, non-toxic, has technically and economically feasible production process and functional properties similar to those of petro-diesel [14–16]. Biodiesel is defined as mono-alkyl esters of long-chain fatty acids derived from various feedstocks, also known as triacylglycerides (TAGs), or more simply, triglycerides [17,18]. Biodiesel can be obtained from various resources which can be sub-divided into four types: edible vegetable oil, non-edible vegetable oil, animal fats and other sources (including algal, waste or recycled oil) [19–23]. Edible and non-edible feedstocks are also referred to as first-generation and second-generation biodiesel feedstocks [24,25]. The disadvantages of first-generation biodiesels are using edible oil as fuel which creates a problem with food supply. Other issues related to the use of edible oils are high cost, limited cultivation area and adaptability issues due to environmental conditions [26]. On the contrary, second-generation biodiesel feedstocks have become popular as they do not contribute to food shortages. Non-edible feedstocks have the following advantages over edible feedstock: less production cost, reduced farmland requirement, and it eradicates food inequality [27,28]. Third-generation biodiesels are those produced from microalgae [29,30]. The significant benefits of biodiesels produced from microalgae are reduced greenhouse effect, elevated productivity, small farming land requirement, higher oil percentage and almost zero-impact on food supply. However, the provision of substantial investment, the necessity of sunlight, large scale production issues and difficulties associated with oil extraction are some critical drawbacks of third-generation biodiesels [31,32]. The conventional process for biodiesel production is transesterification or alcoholysis, in which the triglycerides are reacted with alcohols in the presence of a suitable catalyst (homogeneous/heterogeneous/bio/nano), as a reaction promoter, to produce fatty acid alkyl esters [33]. Table 1 shows some of the feedstocks for biodiesel production.

Anwar [38] studied the 16 most popular biodiesel feedstocks for screening the best feedstock for biodiesel production. He focussed on fifteen economic, technical and environmental aspects of the selection process. Four different multi-criteria decision analysis (MCDA) methods, namely Preference Ranking Organization Method for Enrichment Evaluation (PROMETHEE)-Graphical Analysis for Interactive Assistance (GAIA), weighted sum method (WSM), weighted product method (WPM) and Technique for Order Preference by Similarity to Ideal Solution (TOPSIS) with five weighting methods in percentage, namely EQUAL, CRITIC, ENTROPY, Analytical hierarchical process (AHP), and Fuzzy Analytical Hierarchical Process (FAHP) were used to rank the feedstocks. The study found that coconut was ranked the best and soybean was the worst feedstock for biodiesel production. Anwar et al. [39] ranked six non-edible biodiesels using twelve physicochemical properties as criteria for ranking the above biodiesels. Four different MCDA methods, namely PROMETHEE-GAIA, WSM, WPM, and TOPSIS, were used for the analysis. Based on the research, tone fruit kernel oil biodiesel was ranked the best and waste cooking oil biodiesel was the worst performer in the rank. Kamoun et al. [40] used the MCDA approach to select and rank the most suitable growth media and strain for biodiesel production. They applied the PROMETHEE-GAIA analysis algorithm containing a predicted data set of chemical and physical properties of fuel derived fatty acid methyl

**Table 1**  
Primary feedstocks for biodiesel production [34–37]

Edible oils	Non-edible oils	Animal fats	Other sources
Soybeans ( <i>Glycine max</i> )	<i>Jatropha curcas</i>	Pork lard	Bacteria
Rapeseed ( <i>Brassica napus L</i> )	Mahua ( <i>Madhuca indica</i> )	Beef tallow	Fungi Algae
Rice bran oil ( <i>Oryza sativum</i> )	Pongame oil tree ( <i>Pongamia pinnata</i> )	Poultry fat	(Cyanobacteria) Microalgae
Barley	Camelina ( <i>Camelina Sativa</i> )	Fish oil	Tarpenes
Sesame ( <i>Sesamum indicum L.</i> )	Cottonseed ( <i>Gossypium hirsutum</i> )	Chicken fat	Poplar Switchgrass
Groundnut	Karanja or honge		Miscanthus Latexes
Sorghum	Neem ( <i>Azadirachta indica</i> )		Fungi Recycled oil
Wheat	Jojoba ( <i>Simmondsia chinensis</i> )		
Corn	Passion seed ( <i>Passiflora edulis</i> )		
Coconut	Moringa ( <i>Moringa oleifera</i> )		
Canola	Coffee ground ( <i>Coffea arabica</i> )		
Peanut	Nagchampa ( <i>Calophyllum inophyllum</i> )		
Palm and palm kernel ( <i>Elaeis guineensis</i> )	<i>Croton megalocarpus</i>		
Sunflower ( <i>Helianthus annuus</i> )			

ester (FAME). Based on the analysis, the nature of lipids produced by *Mucor circinelloides* grown on soapstock of refined soybean oil, soapstock of refined olive pomace oil and glucose were found to be suitable for biodiesel production. Ahmad et al. [41] studied the biodiesel production potential of several oleaginous microorganisms such as microalgae (*C. protothecoides* and *C. zofingiensis*), yeasts (*Cryptococcus albidus* and *Rhodotorula mucilaginosa*), and fungi (*Aspergillus oryzae* and *Mucor plumbeus*) using MCDA approach. They used analytic hierarchy process (AHP) and PROMETHEE-GAIA on the basis of different criteria viz., oil concentration, content, substrate consumption rate, production rate and yield, fatty acids composition, biomass harvesting and nutrient costs etc. to rank the preferred microorganisms. Based on the analysis they found *A. oryzae* and *M. plumbeus* were the best performers.

In the present study, several critical physicochemical properties were discussed to facilitate in understanding the effect of those properties in engine performance and emission characteristics, discussed in the next section. Those chosen properties were later used to rank biodiesel using association rules mining. A new scheme is proposed for selecting biodiesels that is free from dependence on prior experiences. The method does not rely on refining parameters using any sophisticated learning algorithm but rather, overcomes the limitations of such algorithms' hunger for feeding on prior intelligence. This scheme first generates transaction against each biodiesel which helps in association rules mining, which is later used to score/rank the biodiesels.

## 2. Critical physicochemical properties

The characterization of fuel properties determines the quality of fuel [42,43]. The key fuel properties of biodiesel fuels are density, viscosity, flash point, heating value, oxidation stability and cetane number.

### 2.1. Density

Density is one of the critical properties of fuel as it affects engine performance, combustion quality as well as other properties such as cetane number and viscosity [44–48]. ASTM standard D1298 and EN ISO 1676 methods are used generally to measure density [25]. An increase in density generally increases fuel droplet size and affects combustion quality [49]. On the other hand, reduced density expands the

efficiency of atomization and air–fuel ratio formation. Furthermore, a higher density of fuel also affects engine emissions [50]. High fuel density increases emissions such as particulate matter (PM) and NOx emission [51,52]. From Table 2, the density varies for biodiesels, i.e. Jojoba biodiesel has the lowest density (832 kg/m<sup>3</sup>) while Castor biodiesel has the highest density (928.5 kg/m<sup>3</sup>).

## 2.2. Kinematic viscosity

Similar to density, kinematic viscosity is a vital parameter for fuel as it governs fuel atomization, spray characteristics and combustion quality [53,54]. Biodiesel quality, while stored, can be checked by measuring the kinematic viscosity. Lower kinematic viscosity results in insufficient lubrication and increases wear and tear [55]. On the other hand, high fuel viscosity may form large droplets at the injection, which deteriorates combustion quality and result in higher exhaust emission. In most cases, biodiesel has higher kinematic viscosity compared to that of petro-diesel [56,57]. According to the ASTM D6751 and EN14214, the kinematic of biodiesel should adhere to 1.9 – 6 mm<sup>2</sup>/s and 3.5 – 5 mm<sup>2</sup>/s, respectively [58].

## 2.3. Heating value

Another critical parameter is the heating value. The amount of energy released when a known volume of the fuel is completely combusted represents fuel energy content [25]. A high heating value is always desired as it favours heat release during combustion and thus improves engine performance [52,59,60]. However, compared to diesel fuel, most biodiesel has a significantly lower heating value which can be associated with the fuel bound oxygen content of biodiesel [25]. From Table 2, biodiesel produced from waste fish oil, *Xanthoceras sorbifolium*, camelina, and jojoba oil was reported to have a higher heating value than that of diesel fuel.

## 2.4. Flash point

Flash point refers to the flammability of fuel and is a safety indication for storage, handling, and transportation [61]. When the fuel is heated, it is the minimum temperature where the fuel will give off adequate vapours to form a combustible mixture above the fuel surface. Biodiesel has a significantly higher flash point compare to pure diesel and thus is considered safe for storage, handling and transportation [62–64]. The USA and EU standard suggests that the flash point for biodiesel should be at least 93 °C and 120 °C, respectively. The flashpoint of biodiesel is impacted by residual alcohol content [65]. The flashpoint is governed by the chemical compositions of biodiesel such as a number of double bonds, the total number of carbon atoms, etc.

## 2.5. Cetane number

Cetane number (CN) governs the ignition quality of fuel and is a measurement of ignition timing inside the combustion chamber [66]. In general, biodiesel has a higher CN compared to that of pure diesel. Higher CN generally indicates shorter ignition delay and earlier combustion, which helps the engine run smoothly [67,68]. Lower CN results in a delayed ignition and tends to increase HC and PM emissions [69]. In general, the CN is associated with saturation levels of biodiesel, and a higher saturation level will have a higher CN, while higher unsaturation levels result in lower CN [70,71].

## 2.6. Oxidation stability

Oxidation stability represents the biodiesel's ability to maintain the fatty acid composition during extended storage without degradation [72,73]. Compared to petroleum diesel, biodiesel is less resistant to oxidation [74]. Oxidation degradation generates oxidation products

which might compromise fuel properties, worsen fuel quality and thus will deteriorate engine performance [75]. Oxidation stability is an important factor because:

- Sediments and gums may form in equipment during use
- Impacts critical fuel properties, e.g., viscosity and cetane number
- Affects engine exhaust emissions
- Promote corrosion, affects component operation due to deposits, varnishes and sediments accumulation on engine parts
- Oxidation products can attack elastomers, clog fuel filters and infect engine lubricating oil.
- May increase engine wear due to corrosive acids and deposits

Biodiesel oxidation stability is affected by fatty acid composition, specifically by the degree of fatty acid unsaturation. Also, impurities such as metals, FFAs, additives and antioxidants strongly affect stability. Oxidation of biodiesel can only be delayed and not wholly prevented. Table 2 shows the critical physicochemical properties of most reported 71 feedstock based biodiesel.

Fig. 1 shows that most of the biodiesel selected for this study adheres to biodiesel standards (ASTM- Kinematic Viscosity, Flash Point, Cetane Number, EN- Density). The standards do not specify a minimum heating value requirement for biodiesels; however, the higher, the better [30].

## 3. Impact of chosen properties on engine performance and emission

Several studies have been conducted which explored engine performance and emissions parameters of diesel engine operated with biodiesel. In general, the heating value of biodiesel is lower compared to diesel fuel. As a result, the use of biodiesel and its blends results in a decrease in engine performance. Yoon *et al.* [207] reported that Palm biodiesel blends exhibited higher brake specific fuel consumption (BSFC) (+3.7 to + 5.8%) compared to diesel fuel which is attributed to higher viscosity, density and lower heating value. Higher BSFC for Palm biodiesel blends was also reported by Sanjid *et al.* [208]. Patel *et al.* [209] reported a reduction of thermal efficiency for soybean biodiesel blends which can be associated with inferior spray atomization due to higher viscosity. 3.8% increase in BSFC for Soybean biodiesel and its blends. Also, the use of Karanja biodiesel and its blends increases BSFC [210,211]. Another study reported that waste cooking oil increased BSFC by 14.34% [212]. Poor atomization and lower heating value compared to diesel fuel are the reason behind increased BSFC and decreased brake thermal efficiency (BTE) [213]. Due to having lower heating value biodiesel and its blends releases less heat during combustion and thus to provide the same amount of power needs more fuel to be injected, thus, increases BSFC [61]. Contrary, the study reported that biodiesel decreases BSFC and increases BTE [214]. They attributed the decreased BSFC to the presence of oxygen in the blend and higher cetane number of the fuel, both of which aid in better combustion reducing BSFC.

Biodiesel is a clean-burning alternative fuel which is produced from renewable sources. It has a strong beneficial effect on carbon monoxide (CO), hydrocarbon (HC) and particulate matter (PM); however, it negatively affects NOx emission. Biodiesel contains about 11% oxygen in the chemical structure compared to diesel which allows more carbon molecules to burn and results in complete fuel combustion. Thus, CO and HC emissions are lower when diesel engines burn biodiesel fuel. Also, the cetane number affects HC and CO emission. The higher cetane number of biodiesel compared to diesel reduces combustion delay and thus decreases emission. Also, the lower volatility of biodiesel may be responsible for lower CO and HC emission [215]. A study reported emission reduction of 18.4% and 42.5% of CO and HC, respectively, in the case of soybean biodiesel blends [216]. *Jatropha* biodiesel blend reduced CO and HC emissions by 14 and 11% respectively [217]. Also, several papers stated that Karanja biodiesel also reduced HC and CO

Table 2

Key physicochemical properties of biodiesels.

No.	Ref	Biodiesel	Density at 15 °C kg/m <sup>3</sup>	Kinematic viscosity At 40 °C mm <sup>2</sup> /s	Heating value MJ/kg	Flash point °C	Cetane Number	Oxidation stability hr
1.	[76]	<i>Cascabela ovata</i>	866.8	4.98	–	93	–	–
2.	[77]	Cedar	924	6.1	39.49	58	–	–
3.	[23,78]	<i>Crambe abyssinica</i>	872	6	39.56	136	–	–
4.	[77]	Cypress	912	2.7	39.22	67	–	–
5.	[79]	Dairy Scum	890	5.35	38.94	195	–	–
6.	[80]	Dairy washed milkscum	875	3.8	40.12	151	–	–
7.	[81]	Fish waste	890	5.3	38.1	–	–	–
8.	[82]	Hiptage	837	16.3	33.12	49.33	–	–
9.	[81,83]	Marine fish oil	860	4.4	41.37	–	–	–
10.	[77]	Red pine	875	1.4	41.42	44	–	–
11.	[23,84]	Spirulina	860	5.66	41.36	130	–	–
12.	[85]	Waste frying oil	886	4.71	–	169	–	–
13.	[77]	White pine	888	1.6	41.67	48	–	–
14.	[23,86–88]	Linseed	852	3.95	37.45	241	34.6	1.5
15.	[89,90]	<i>Citrus sinensis</i>	900	3.79	35.47	190	37	–
16.	[91]	<i>Styrax officinalis L.</i>	886	3.57	39.023	175	40.47	2.69
17.	[92]	Waste fish oil	875	4.14	51.5	169	41	–
18.	[23,93,94]	Bitter almond	884	4.60	41.76	169	45.18	–
19.	[23,95]	Fish oil	881	4.45	40.54	177	47	–
20.	[96,97]	<i>X. sorbifolium</i>	881.6	4.67	48.56	121.55	47.3	2.53
21.	[98,99]	Argemone	837	4.38	37.5	193	47.5	1.44
22.	[23,100–103]	Chicken fat	883	5.14	40.17	175	48	6.46
23.	[23,104–106]	Cotton Seed	897	4.19	39.75	210	48.1	1.88
24.	[107]	<i>Tetrademus obliquus</i>	–	3.88	39.44	–	48.15	–
25.	[39]	Pappaya Seed	840	3.53	38.49	112	48.29	5.61
26.	[23,108,109]	Camelina	885	4.11	45.2	150	48.91	–
27.	[79,110]	Simarouba Glauca	864	5.48	38.41	175	49.1	–
28.	[22,23,106,111,112]	Sunflower	865.5	4.39	37.5	178	50	0.9
29.	[23,113]	Michelia champaca	870	5.11	39.51	158	50.28	–
30.	[39]	Stone fruit kernel	855	4.26	39.64	105	50.45	7.15
31.	[23,106,114–118]	Soybean	882	4.37	35.74	170	51	1.5
32.	[23,112,119–121]	Neem	873	6.1	40	144.75	51.26	2.13
33.	[23,122,123]	Tobacco	865	3.56	42.22	165	51.5	–
34.	[23,112,124–130]	Castor	928.5	15.55	38.2	188.9	51.9	7
35.	[131]	Waste edible oil	877	4.43	39	–	52	–
36.	[23,106,132–134]	Olive	871	4.32	39.96	169.5	52	4.29
37.	[135,136]	<i>Chlorella</i> <i>protothecoides</i>	900	4.22	40.04	124	52	12
38.	[23,39,106,115,137–139]	Rapeseed	880.5	4.47	37.42	167	52.4	4.5
39.	[23,39,81,140–143]	Waste cooking oil	876	4.13	38.25	185	52.5	0.47
40.	[23,115,144,145]	Rubber	875	5.6	39.17	173.4	53	0.8
41.	[106,146]	Safflower	885	4.6	38.12	180	53	2.4
42.	[23,39,82,147–150]	Jatropha	872	4.39	38.52	147	53.8	3.01
43.	[151]	Waste eggshell	890	4.98	42.18	180	54	–
44.	[23,106,114,152–154]	Canola oil	878	4.42	39.49	172	54	1.9
45.	[39]	Beauty leaf oil	868.7	5.68	39.38	141.5	54	3.58
46.	[155–157]	Coffee	857.5	5.43	39.43	242	54.55	6.5
47.	[158–161]	<i>Chlorella vulgaris</i>	895	4.1	42.7	163	54.7	5
48.	[23,162–164]	Mahua	895	4.77	16.9	129.5	55	8.2
49.	[106,165]	Corn	878	4.42	39.93	172	56	1.3
50.	[23,155,166–168]	Mustard ( <i>Brassica</i> <i>Juncea</i> )	879	5.53	40.4	169	56	16
51.	[169–172]	<i>Calophyllum</i> <i>inophyllum</i>	880.7	4.68	38.02	150.8	56.3	3.58
52.	[23,173–176]	Karanja	889	4.79	36.56	157.4	56.55	2.65
53.	[177,178]	Date seed oil	878	4.85	41	107	57.1	–
54.	[23,179,180]	<i>Terminalia catappa</i>	876	4.3	37.73	90	57.1	32.5
55.	[155]	Cardoon ( <i>Cynara</i> <i>cardunculus</i> )	880	9.5	40.69	309	57.4	12
56.	[23,181–183]	Kusum	875	4.34	39.45	152	57.86	6.5
57.	[184]	Tannery waste	870	4.6	–	150	58	–
58.	[185]	Poppy seed oil	896	4.58	39.99	203	55.5	7.81
59.	[23,186]	Peanut	878	4.69	35.44	176	58.24	5
60.	[23,114,187,188]	Palm	871.9	4.58	36.97	169.7	58.6	10.5
61.	[23,87,189,190]	Sesame	867	4.23	40.25	176.7	58.97	6.25
62.	[106]	Algae	881	4.55	–	140	59	2.3
63.	[23,191]	Groundnut	920	4.4	39.8	132	59.85	–
64.	[23,192,193]	Beef tallow	832	4.89	40.23	152	60.36	1.99
65.	[79,194,195]	Yellow Oleander	886	5.81	37.89	160	61.5	6.5
66.	[23,106,189,196]	Hazelnut	896	4.81	39.58	173	63	2.1
67.	[23,197]	Babassu	872	4.2	31.8	117	63.25	–
68.	[23,198–200]	Jajoba	866	19.2	44.77	80.5	63.5	–

(continued on next page)

Table 2 (continued)

No.	Ref	Biodiesel	Density at 15 °C kg/m <sup>3</sup>	Kinematic viscosity At 40 °C mm <sup>2</sup> /s	Heating value MJ/kg	Flash point °C	Cetane Number	Oxidation stability hr
69.	[23,201]	Animal fat	875	4.25	36.73	–	63.88	–
70.	[15,23,46,202]	Coconut	867	3.2	35.2	114	64.65	5.12
71.	[23,203–206]	Rice bran	889	5.15	38.17	161	64.95	1.7

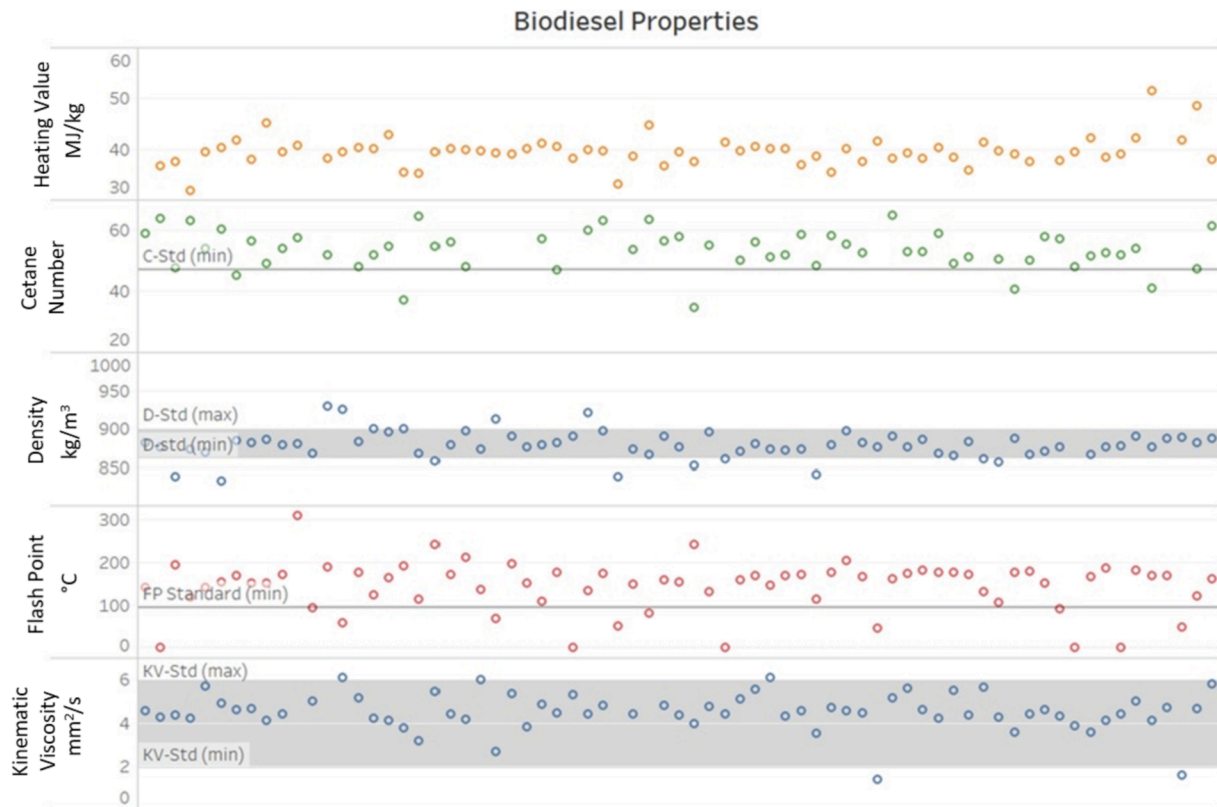


Fig. 1. Selected biodiesel properties. The range of the property is specified in the shaded area. The heating value range is not specified in standards. The only minimum value is specified for flash point and cetane number.

emissions [210,211]. *Calophyllum* biodiesel blends reduced HC emission by almost 6.84% compared to diesel fuel [218]. However, biodiesel increases NO<sub>x</sub> emission. A study reported that *Jatropha* biodiesel and its blends increased emission by 7% compared to diesel fuel [217]. *Karanja* biodiesel increased emission by 11.2–17.62% compared to diesel fuel [216,219]. *Calophyllum* biodiesel increased NO<sub>x</sub> emission by 17.87–22.5% compared to diesel fuel [218]. However, some authors reported an increase of CO emission for biodiesel blends which can be associated with poor combustion quality [220,221], some authors reported reduced NO<sub>x</sub> emission due to higher cetane number of biodiesel [222,223].


#### 4. Biodiesel ranking

A blend of biodiesel and petro-diesel (without/with additives) may be beneficial for improved fuel property and lubricity, enhanced engine performance, lesser pollutant emissions and greater energy security for the future [224–227]. There being different sources, a legit question may be which biodiesel should be blended with petrodiesel for optimal performance of a diesel engine. As an attempt to aid in making such a choice, this paper puts forth a ranker (Fig. 2) designed to take into consideration six attributes: density (in kg/m<sup>3</sup>), viscosity (mm<sup>2</sup>/s), heating value (MJ/kg), flash point (°C), cetane number and oxidation stability.

##### 4.1. Preparation of transactions

This extensive literature review endeavours to extract numerical values of the six separate physicochemical properties of 71 distinct biodiesels. The scrutinized biodiesels have been passed through three phases to assign each of them a rank. The first super-step has the objective of preparing a transaction against each biodiesel. This is for mining association rules to infer values in place of the ones missing. The knowledge that lower values in density and viscosity; while upper values in heating value, oxidation stability, cetane number and flash point indicate goodness, helped design the Boolean transactions. This involved two steps:

- Comparison of each attribute with its median put into a boolean array, evaluating to 1 in the case above or equal to the median and 0 in the case below the median (and vice-versa for properties showing goodness with diminishing values). The statistic: median has been appropriate because of its capability to divide any sample into two equal tails.
- Building of transactions against each biofuel, with the highs indicating desirability and the lows, a comparatively less desirable behaviour (Fig. 3). From a universal set of 71 transactions against a total of 71 biofuels, only a subset of complete cases are chosen for mining association rules. Since the rules thus generated would be

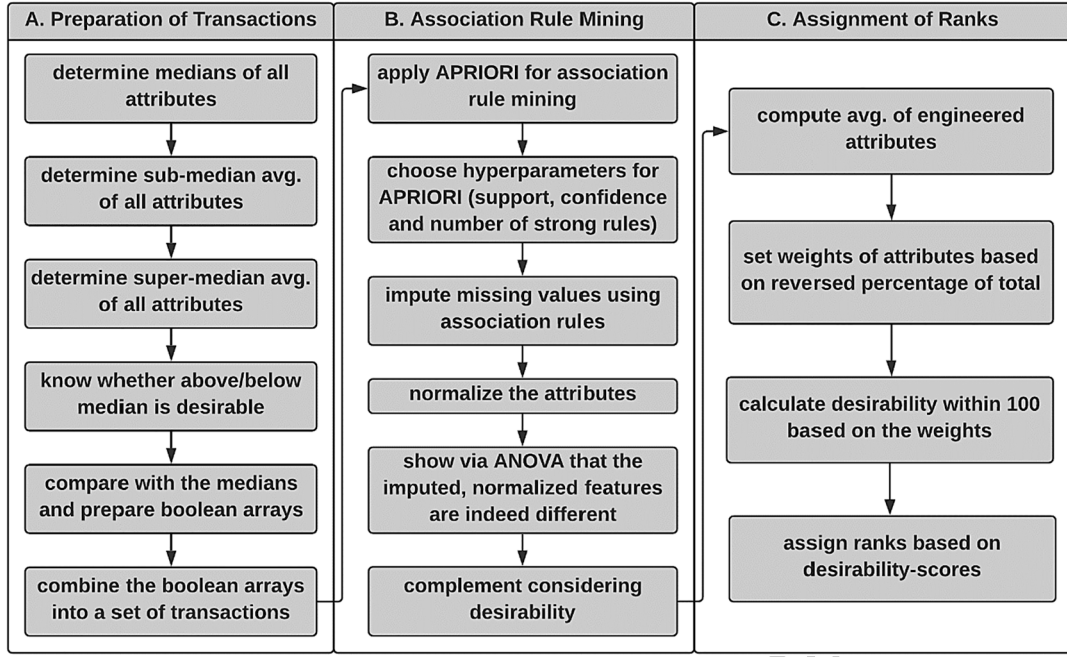

**Fig. 2.** A flowchart showing the process of ranking biodiesels in three super-steps (A, B, C)(The terms: *sub-median* and *super-median*, are referred to as *lower-median* and *upper-median*, respectively at some places. The two terms refer to the portions less than and greater than the median, respectively.)

density	viscosity	heating_value	flash_point	cetane_number
1.0	1.0	1.0	1.0	1.0
0.0	1.0	0.0	1.0	0.0
0.0	0.0	1.0	1.0	0.0
1.0	1.0	0.0	0.0	0.0
1.0	1.0	1.0	0.0	0.0
1.0	0.0	0.0	1.0	0.0
1.0	0.0	1.0	0.0	1.0
0.0	0.0	0.0	0.0	1.0
0.0	0.0	0.0	1.0	0.0

**Fig. 3.** A subset of boolean transactions itemizing 5 of the properties, representative of a single biofuel each.

used to fill in missing desirabilities, this exclusion makes considerable sense.

#### 4.2. Association rule mining

The second super-step involves mining the association rules using the APRIORI algorithm. The algorithm explores the tendencies of helpful behaviours being found together. Hence if a desirable property is frequently found with another with high confidence, we infer an optimistic value for the missing property. The algorithm (Fig. 4) has been tuned to bring out the closest associations covering all the attributes. Lower support ( $\geq 0.1$ ) and higher confidence ( $\geq 0.8$ ) brought to the fore top-25 rules. To infer the missing values, we look at the generated rules (Fig. 5) and fill in values using the upper-median and lower-median means calculated in A. For example, the first 3 generated rules in Fig. 5 show that helpful oxidation stability is frequently coupled with desirable viscosity, heating value and density; a claim supported highly (0.44 to 0.55) with full confidence (1.00). Again, the rules: 7, 10, 12, 17, 19 in Fig. 5 reveal certain conditions based on which we can infer favourable values for density, i.e., lower\_mean\_density in Fig. 6. On the contrary, the absence of these can be indicative of less desirable attributes, i.e., upper\_mean\_density (Fig. 6). After completing the dataset we normalize the values for an ANOVA-test, with an objective of showing that the imputations have indeed maintained the segregation of the distributions of the attributes and the imputation is thus valid (Fig. 7).

Under such circumstances, a clarification on the definitions of the terminology used here—with proper justification—may be helpful. Below are the distinctions of the terms with contextual insights:

**Properties:** Properties are the qualities of biofuels from different perspectives. In the context of this study, the raw data generated by reviewing literature indicates these dimensions, which can be quantified by numerics coupled with certain units.

**Features:** Properties, when used for any mathematical modelling—such as: applying learning algorithms, applying inferential or descriptive statistics—are called features. Contextually, the six properties can be termed as features for applying ANOVA, calculating scores and ranking.

**Attributes:** A property, when quantified with numeric values, is said to be an attribute. This concept hails from Database Management Systems (DBMS). In the context of this paper, the six features are furnished with fuel-specific numeric or null attributes.

**Treatments:** For a statistical ANOVA, multiple groups are formed, and each is served with a different application of any single matter of experimental interest. These are called different treatments. In our context, the different features (X) are causing different attributes (Y) and are playing this role.

One-way ANOVA worked on numerical response data (Y)—in our case, different numeric attributes (Y) for individual biodiesels against different features (X). The six quality-metrics created six different groups, and at any point in time, we assume a single feature (treatment) to be different in different biodiesels. ANOVA analyzed if there existed any significant difference among the responses of the biodiesels to a single quality-parameter.

There exists a total of 71 examples for all  $a = 6$ —i.e.,  $a_1, a_2, a_3, a_4, a_5, a_6$ —groups combined. The null hypothesis,  $H_0$  is that all the groups produce the same average numeric response upon a single quality-indicator. Let,  $n$  is the count of examples per quality-feature.

- First, determine the mean within each group,

$$\bar{y} = \frac{1}{n} \sum_j y_{ij} \quad (1)$$

where  $i$  indexes over  $a$  and  $j$  indexes over  $n$ .

- Second, calculate the grand mean,

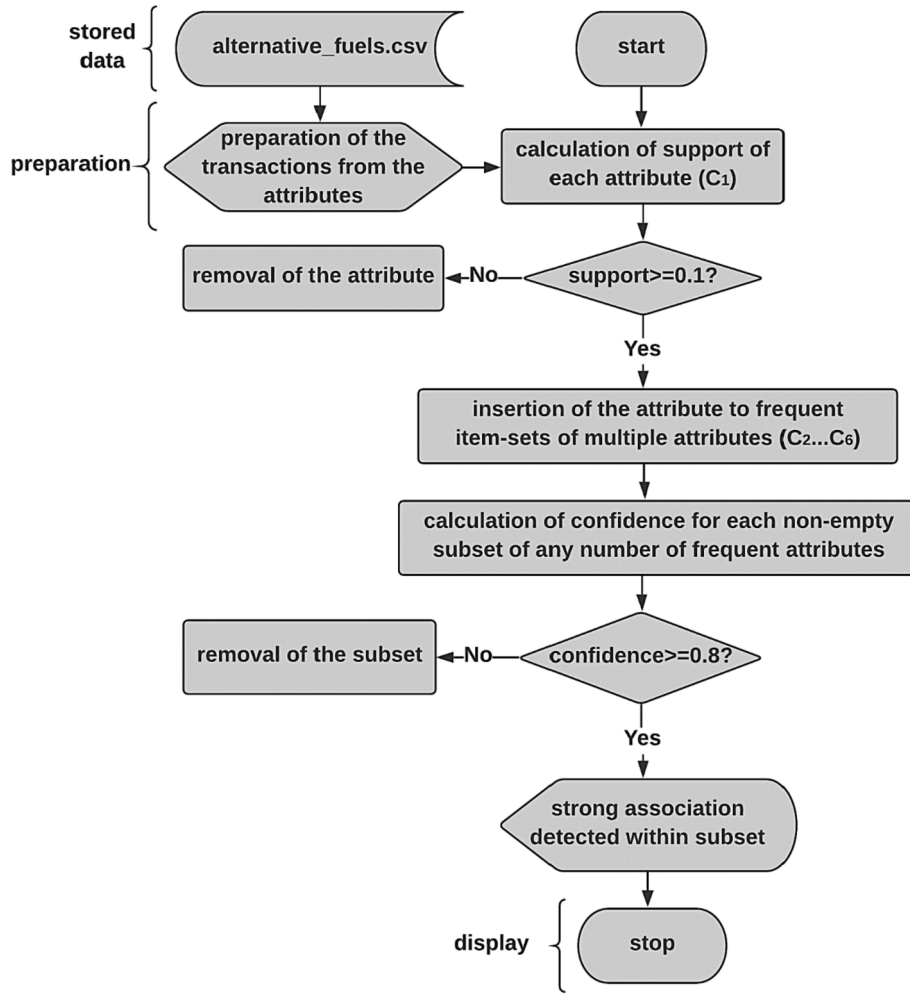


Fig. 4. The APRIORI algorithm, hyper parametrically-tuned for exploring associations.

```

> inspect(head(strong_rules, 25))

```

	lhs	rhs	support	confidence	lift
[1]	{viscosity}	=> {oxidation_stability}	0.4444444	1	1.285714
[2]	{heating_value}	=> {oxidation_stability}	0.4444444	1	1.285714
[3]	{density}	=> {oxidation_stability}	0.5555556	1	1.285714
[4]	{viscosity,cetane_number}	=> {flash_point}	0.1111111	1	1.800000
[5]	{flash_point,cetane_number}	=> {viscosity}	0.1111111	1	2.250000
[6]	{viscosity,cetane_number}	=> {heating_value}	0.1111111	1	2.250000
[7]	{viscosity,cetane_number}	=> {density}	0.1111111	1	1.800000
[8]	{viscosity,cetane_number}	=> {oxidation_stability}	0.1111111	1	1.285714
[9]	{flash_point,cetane_number}	=> {heating_value}	0.1111111	1	2.250000
[10]	{flash_point,cetane_number}	=> {density}	0.1111111	1	1.800000
[11]	{flash_point,cetane_number}	=> {oxidation_stability}	0.1111111	1	1.285714
[12]	{heating_value,cetane_number}	=> {density}	0.2222222	1	1.800000
[13]	{density,cetane_number}	=> {heating_value}	0.2222222	1	2.250000
[14]	{heating_value,cetane_number}	=> {oxidation_stability}	0.2222222	1	1.285714
[15]	{cetane_number,oxidation_stability}	=> {heating_value}	0.2222222	1	2.250000
[16]	{density,cetane_number}	=> {oxidation_stability}	0.2222222	1	1.285714
[17]	{cetane_number,oxidation_stability}	=> {density}	0.2222222	1	1.800000
[18]	{viscosity,flash_point}	=> {oxidation_stability}	0.2222222	1	1.285714
[19]	{viscosity,heating_value}	=> {density}	0.2222222	1	1.800000
[20]	{viscosity,heating_value}	=> {oxidation_stability}	0.2222222	1	1.285714
[21]	{density,viscosity}	=> {oxidation_stability}	0.3333333	1	1.285714
[22]	{heating_value,flash_point}	=> {oxidation_stability}	0.2222222	1	1.285714
[23]	{density,flash_point}	=> {oxidation_stability}	0.2222222	1	1.285714
[24]	{density,heating_value}	=> {oxidation_stability}	0.3333333	1	1.285714
[25]	{viscosity,flash_point,cetane_number}	=> {heating_value}	0.1111111	1	2.250000

Fig. 5. Strong rules output by ARIORI for imputing blank values.

```
# filling in the missing entries in the dataset with APRIORI association rules
for i in range(0, rows):
    if(density[i]==None):
        if(viscosity==1 and cetane_number==1): density_orig[i]=lower_mean_density
        elif(flash_point==1 and cetane_number==1): density_orig[i]=lower_mean_density
        elif(heating_value==1 and cetane_number==1): density_orig[i]=lower_mean_density
        elif(cetane_number==1 and oxidation_stability==1): density_orig[i]=lower_mean_density
        elif(viscosity==1 and heating_value==1): density_orig[i]=lower_mean_density
        elif(viscosity==1 and flash_point==1 and cetane_number==1): density_orig[i]=lower_mean_density
        else: density_orig[i]=upper_mean_density

    if(viscosity[i]==None):
        if(flash_point==1 and cetane_number==1): viscosity_orig[i]=lower_mean_viscosity
        elif(heating_value==1 and flash_point==1 and cetane_number==1): viscosity_orig[i]=lower_mean_viscosity
        else: viscosity_orig[i]=upper_mean_viscosity
```

Fig. 6. Imputation of missing attributes based on ARRIORI-rules (Shown for two properties).

```
> summary(anova_results)
          Df Sum Sq Mean Sq F value Pr(>F)
ind         5  42.24    8.448   524.6 <2e-16 ***
Residuals 612   9.86    0.016
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Fig. 7. ANOVA-test results verifying the disparate distribution of features after imputation.

$$\bar{Y} = \frac{\sum_i \bar{Y}_i}{a} \quad (2)$$

- Third, determine the between-group sum of squared differences:

$$S_B = \sum_i (\bar{Y}_i - \bar{Y})^2 \quad (3)$$

and divide it by the between-group degrees of freedom,  $f_b = (a - 1)$  to find the between-group mean square value,  $MS_B$

- Fourth, determine the within-group sum of squared differences:

$$\sum_j \sum_i (Y_{ij} - \bar{Y}_i)^2$$

and divide it by the within-group degrees of freedom,  $f_w = a(n - 1)$  to find the within-group mean square value,  $MS_w$

- Finally, compute

$$F = \frac{MS_B}{MS_w} \quad (4)$$

If the F-ratio surpasses the F-ratio for a threshold p-value = 0.05, then reject the null hypothesis and accept the alternative hypothesis,  $H_a$ , which recognizes a significant difference in the distributions of the different features (F-ratio = 524.6, p-value <  $2e^{-16}$ ).

## Normalized, Desirable Avg. of Attributes

Avg. Density'	0.0694
Avg. Oxidation Stability	0.2133
Avg. Flash Point	0.4976
Avg. Viscosity'	0.6929
Avg. Heating Value	0.7417
Avg. Cetane Number	0.7927

## Measure Values



Fig. 8. Transformed attributes averages after normalization.

## 4.3. Assignment of ranks

The final phase deals with assigning a 'desirability' score to each of the biodiesels, based on which they are finally ranked. To keep the weights of all the attributes positive, we complement the normalized values of particular attributes negatively impacting the overall score, namely: density and viscosity. We then compute the average (Fig. 8) of the normalized features and assign weights to them basis this tables reversed percentage of the total, prioritizing the scarcest attribute to assume the highest weight. Next, we transform the sum of products within 100 to generate the desirability and eventual ranks (Eq. (5)).

$$\begin{aligned} Desirability = & (Density*0.2635 + Oxidation\ Stability*0.2465 \\ & + Flash\ Point*0.2304 + Viscosity*0.1654 \\ & + Heating\ Value*0.0709 + Cetane\ Number*0.023)*100 \end{aligned} \quad (5)$$

## 5. Results and discussions

### 5.1. Results

This article focusses on ranking the biodiesels based on the critical physicochemical properties chosen. As discussed previously, the properties, e.g. density, kinematic viscosity, heating value and CN etc. directly affect the combustion of these fuels. However, during long term storage of fuels, the physicochemical properties deteriorate which is governed by the composition of biodiesel. Any change in composition determined through change is oxidation stability and flash point. Flash point also determines safe handling temperature for any fuel. As such, flash point and oxidation stability are critical factors for transport and long term storage of biodiesel. A ranking system has been proposed in this study based on those selected properties. The ranking consists of three phases (or, super-steps): A, B, C and their subordinate sub-steps, which have been carried out using the platforms: Python, R and Tableau respectively. Table 3 shows the ranking of all the biodiesel feedstocks. The study endorses *Brassica juncea*, Cardoon (*Cynara cardunculus*), poppyseed oil, coffee oil and rapeseed oil as the Top 5 desirable biodiesels from the ranking policy which have the most desirability scores (ranging from 65.49 to 46.58) (Table 3). However, biodiesel ranked between 16 and 23rd: Safflower, tobacco, soybean, *citrus sinensis*, beauty leaf oil, dairy scum, fish oil and waste eggshell all have almost similar desirability score. Thus a fast-tracked result has been obtained from a feedstock tally of 71 with six chosen physicochemical properties for each feedstock. A previous study by Anwar [38] used not only physicochemical aspect of biodiesels but also the economic and environmental aspects of those while ranking sixteen most popular biodiesel feedstocks. He used four separate MCDA systems: PROMETHEE-GAIA, WSM, WPM and TOPSIS with five weighting methods, EQUAL, CRITIC, ENTROPY, AHP, and FAHP were used to come to a conclusion. Out of twenty results, fourteen ranked coconut oil as the most favoured feedstock with *moringa* is the second preferred

**Table 3**

Desirability-scores and ranks assigned against each biodiesel.

Rank	Avg. Desirability	Biodiesel	Rank	Avg. Desirability	Biodiesel
1	65.49	Brassica	37	36.39	<i>Michelia champaca</i>
2	63.12	Cardoon	38	36.38	Rice bran
3	59.66	Poppy seed oil	39	36.38	Canola
4	59.44	Coffee	40	36.17	Algae
5	46.58	Rapeseed oil	41	36.16	Tannery waste
6	44.43	Stone fruit kernel	42	36.16	Waste cooking oil
7	43.36	Linseed	43	36.06	Kusum
8	42.74	sPapaya Seed	44	35.79	Karanja
9	42.25	Palm	45	35.67	<i>Calophyllum inophyllum</i>
10	41.27	Jatropha curcas	46	35.12	Marine fish oil
11	40.36	Cotton Seed	47	35.10	Yellow Oleander
12	40.25	argemone	48	35.03	<i>X. sorbifolium</i>
13	40.04	Styrax officinalis L.	49	34.95	Coconut
14	39.33	Waste fish oil	50	34.79	Animal fat
15	39.13	Sesame	51	34.62	Chlorella vulgaris
16	38.98	Safflower	52	34.47	Tetrademus obliquus
17	38.96	Tobacco	53	34.45	waste edible oil
18	38.59	Soybean	54	34.21	Spirulina
19	38.57	citrus sinensis	55	34.12	Groundnut
20	38.31	Beauty leaf tree	56	34.09	Neem
21	38.19	Dairy Scum	57	33.86	<i>Chlorella protothecoides</i>
22	38.16	Fish oil	58	33.75	<i>Crambe abyssinica</i>
23	38.10	Waste eggshell	59	33.55	Babassu
24	37.86	Hazelnut	60	33.06	Date seed oil
25	37.67	Beef tallow	61	32.97	Fish waste
26	37.63	Peanut	62	31.93	<i>Terminalia catappa</i>
27	37.22	<i>Simarouba Glauca</i>	63	31.50	Red pine
28	37.10	Olive	64	31.28	White pine
29	37.08	Sunflower	65	31.27	Cascabela ovata
30	37.07	Camelina	66	30.95	Mahua
31	37.01	Chicken fat	67	30.64	Jojoba
32	36.98	Dairy washed milkscum	68	30.63	Cypress
33	36.97	Rubber	69	26.38	Cedar
34	36.73	Bitter almond	70	25.38	Castor
35	36.66	Waste frying oil	71	17.43	Hiptage
36	36.64	Corn			

option which signifies a variance based on the weighting method used. Our proposed method is a simplified approach in this regard.

## 5.2. Advantages of proposed scheme from computational and empirical viewpoints

The scheme proposed in this paper for choosing general-purpose biodiesels is unique since this is a procedural, intuitive method free from dependence on prior experiences, more popularly known as supervised or labelled datasets in computer science. The method does not rely on refining parameters using any sophisticated learning algorithm but rather, overcomes the limitations of such algorithms' hunger for feeding in prior intelligence. The procedure exhibits more of its intuitive nature in the following ways:

- Usage of a simple statistical median could even separate the properties as desirable or unwanted, paving the way to creating a single boolean vector (or, a transaction in the jargon of the Business Intelligence algorithm: APRIORI) against each biofuel. This indicated if the properties were favourable and facilitated the formation of groups, which in turn lent the intelligence, whether certain helpful properties were found together.
- The method could overcome the limitation of missing entries by inferring those from ARIORI-results. The grouped itemsets revealed tendencies from complete tuples, which were eventually mapped to the incomplete ones.
- The method ensures a fair comparison of all the parameters by normalizing them. The comparison is further strengthened by the complementation of properties that are more favourable in their lower numeric values. In short, the act of complementation ensured orientation towards desirability.
- After setting up an ANOVA-tested competitive environment based on favourability for mechanical engineering purposes, the method ensures higher scores of biofuels showing greater values on rarer qualities. The ranker implements this idea by setting weights against each criterion by reversing the percentage of the total of all average—normalized, and in some cases, complemented as well—properties.
- The solution here serves a general-purpose utility, showing the flexibility to be tailored for case-specific purposes. This can be executed by setting up transactions after comparing with specialized desirables, instead of descriptive medians.

## 6. Conclusions

Biodiesel is considered as one of the most promising alternatives to reduce the dependency on diesel import. The paper describes some critical properties which were used to rank the 71 most reported biodiesel feedstocks in the literature. The biodiesel feedstocks chosen in this study adheres to the biodiesel standards (ASTM D6751 and EN14214). This paper proposes a ranking method to select the most suitable biodiesel based on six vital physicochemical properties which include: density (in kg/m<sup>3</sup>), kinematic viscosity (in mm<sup>2</sup>/s), heating value (in MJ/kg), flash point (in °C), cetane number and oxidation stability. The three phases and their subordinate sub-steps have been carried out using the platforms: Python, R and Tableau, respectively. The proposed ranking system ranks the biodiesel based on desirability score, and the top 5 are mustard (*Brassica juncea*), cardoon (*Cynara cardunculus*), poppy seed, coffee and rapeseed biodiesel. By no means we claim that the proposed method is the optimal method for ranking biodiesel. There are many other methods discussed in the literature. This work represents the use of more streamlined software to perform the task. We believe that there is a great deal of potential for designing even better techniques for scoring and ranking using association rules mining.

## CRedit authorship contribution statement

**S.M.A. Rahman:** Writing - original draft, Software, Validation. **I.M. R. Fattah:** Investigation, Resources, Writing - review & editing. **S. Maitra:** Methodology, Software, Validation, Formal analysis, Data curation. **T.M.I. Mahlia:** Writing - review & editing, Resources, Supervision.

## Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## References

- [1] J. Blackburn. Australia's Liquid Fuel Security: A Report for NRMA Motoring and Services, Sydney, 24pp. 2013.
- [2] energy.gov.au. International Energy Agency (IEA) program treaty. URL: <https://www.energy.gov.au/government-priorities/international-activity/international-energy-agency-iaea-program-treaty>. Date accessed: 10th November, 2020. 2020.
- [3] H. Laidlaw. Liquid fuel security: a quick guide–May 2020 update. URL: [https://parlinfo.aph.gov.au/parlInfo/download/library/prspub/7329244/upload\\_binary/7329244.pdf](https://parlinfo.aph.gov.au/parlInfo/download/library/prspub/7329244/upload_binary/7329244.pdf). in: Parliamentary Library, (Ed.). RESEARCH PAPER SERIES 2019–20.
- [4] A. Taylor. Australia to boost fuel security and establish national oil reserve. URL: <https://www.minister.industry.gov.au/ministers/taylor/media-releases/australia-boost-fuel-security-and-establish-national-oil-reserve>. 2020.
- [5] Mofijur M, Fattah IMR, Alam MA, Islam ABMS, Ong HC, Rahman SMA, et al. Impact of COVID-19 on the social, economic, environmental and energy domains: Lessons learnt from a global pandemic. Sustainable Production and Consumption. 2021;26:343–59.
- [6] Xie J, Teng J, Fan Y, Xie R, Shen A. The short-term effects of air pollutants on hospitalizations for respiratory disease in Hefei, China. Int J Biometeorol 2019; 63:315–26.
- [7] Wu X, Nethery RC, Sabath BM, Braun D, Dominici F. Exposure to air pollution and COVID-19 mortality in the United States. medRxiv. 2020.
- [8] Mofijur M, Fattah IMR, Islam ABMS, Uddin MN, Rahman SMA, Chowdhury MA, et al. Relationship between Weather Variables and New Daily COVID-19 Cases in Dhaka, Bangladesh. Sustainability 2020;12:8319.
- [9] E.B. Aagenes, E. Fergestad, A. Gaim, R.M. Grinde, K.K. Heffeman, D.P.T. Hollekim, et al. Greenhouse Gas Emissions and Climate Change Policies around the World. 2017.
- [10] Jain AK, Tao Z, Yang X, Gillespie C. Estimates of global biomass burning emissions for reactive greenhouse gases (CO, NMHCs, and NOx) and CO<sub>2</sub>. Journal of Geophysical Research: Atmospheres. 2006;111.
- [11] Künzi L, Krapf M, Daher N, Dommen J, Jeannet N, Schneider S, et al. Toxicity of aged gasoline exhaust particles to normal and diseased airway epithelia. Sci Rep 2015;5:11801.
- [12] Calderón-Garcidueñas L, Villarreal-Ríos R. Living close to heavy traffic roads, air pollution, and dementia. The Lancet. 2017;389:675–7.
- [13] Rahman SMA, Masjuki H, Kalam M, Abedin M, Sanjid A, Imtenan S, et al. Assessing Effects of Idling of a Diesel Engine Operated with Optimized Blend of Palm and Mustard Biodiesel. SAE Technical Paper 2014.
- [14] Mahlia TMI, Syazmi Z, Mofijur M, Abas AEP, Bilad MR, Ong HC, et al. Patent landscape review on biodiesel production: Technology updates. Renew Sustain Energy Rev 2020;118.
- [15] Atabani A, Mahlia T, Masjuki H, Badruddin IA, Yusoff HW, Chong W, et al. A comparative evaluation of physical and chemical properties of biodiesel synthesized from edible and non-edible oils and study on the effect of biodiesel blending. Energy. 2013;58:296–304.
- [16] Shahir SA, Masjuki HH, Kalam MA, Imran A, Rizwanul Fattah IM, Sanjid A. Feasibility of diesel–biodiesel–ethanol/bioethanol blend as existing CI engine fuel: An assessment of properties, material compatibility, safety and combustion. Renew Sustain Energy Rev 2014;32:379–95.
- [17] Fattah IMR, Ong HC, Mahlia TMI, Mofijur M, Silitonga AS, Rahman SMA, et al. State of the Art of Catalysts for Biodiesel Production. Front Energy Res 2020;8.
- [18] Ruhul AM, Kalam MA, Masjuki HH, Fattah IMR, Reham SS, Rashed MM. State of the art of biodiesel production processes: a review of the heterogeneous catalyst. RSC Adv 2015;5:101023–44.
- [19] Ahmad A, Yasin N, Derek C, Lim J. Microalgae as a sustainable energy source for biodiesel production: a review. Renew Sustain Energy Rev 2011;15:584–93.
- [20] Kafuku G, Mbarawa M. Biodiesel production from *Croton megalocarpus* oil and its process optimization. Fuel 2010;89:2556–60.
- [21] Karmee SK, Chadha A. Preparation of biodiesel from crude oil of *Pongamia pinnata*. Bioresour Technol 2005;96:1425–9.
- [22] Singh S, Singh D. Biodiesel production through the use of different sources and characterization of oils and their esters as the substitute of diesel: a review. Renew Sustain Energy Rev 2010;14:200–16.
- [23] Singh D, Sharma D, Soni S, Sharma S, Kumari D. Chemical compositions, properties, and standards for different generation biodiesels: A review. Fuel 2019; 253:60–71.
- [24] Tayari S, Abedi R, Rahi A. Comparative assessment of engine performance and emissions fueled with three different biodiesel generations. Renewable Energy 2020;147:1058–69.
- [25] Ashraf AM, Masjuki HH, Kalam MA, Rizwanul Fattah IM, Imtenan S, Shahir SA, et al. Production and comparison of fuel properties, engine performance, and emission characteristics of biodiesel from various non-edible vegetable oils: A review. Energy Convers Manage 2014;80:202–28.
- [26] Singh D, Sharma D, Soni SL, Sharma S, Kumar Sharma P, Jhalani A. A review on feedstocks, production processes, and yield for different generations of biodiesel. Fuel 2020;262:116553.
- [27] Mahdavi M, Abedini E, A. hosein Darabi. Biodiesel synthesis from oleic acid by nano-catalyst (ZrO<sub>2</sub>/Al<sub>2</sub>O<sub>3</sub>) under high voltage conditions. RSC. Advances. 2015; 5:55027–32.
- [28] Aransiola EF, Ojumu TV, Oyekola O, Madzimbamuto T, Ikhu-Omoregbe D. A review of current technology for biodiesel production: State of the art. Biomass Bioenergy 2014;61:276–97.
- [29] Tariq M, Ali S, Khalid N. Activity of homogeneous and heterogeneous catalysts, spectroscopic and chromatographic characterization of biodiesel: A review. Renew Sustain Energy Rev 2012;16:6303–16.
- [30] Fattah IMR, Noraini M, Mofijur M, Silitonga AS, Badruddin IA, Khan TMY, et al. Lipid Extraction Maximization and Enzymatic Synthesis of Biodiesel from Microalgae. Applied Sciences. 2020;10:6103.
- [31] Tariq M, Ali S, Khalid NJR, Reviews SE. Activity of homogeneous and heterogeneous catalysts, spectroscopic and chromatographic characterization of biodiesel: A review. 16 (2012) 6303–16.
- [32] Paul Abishek M, Patel J, Prem Rajan A. Algae oil: A sustainable renewable fuel of future. Biotechnol Res Int 2014;2014:272814.
- [33] Mofijur M, Arafat Siddiki SY, Ahmed MB, Djavanroodi F, Fattah IMR, Ong HC, et al. Effect of nanocatalysts on the transesterification reaction of first, second and third generation biodiesel sources- A mini-review. Chemosphere 2020;128642.
- [34] Atabani AE, Silitonga AS, Badruddin IA, Mahlia TMI, Masjuki HH, Mekhilef S. A comprehensive review on biodiesel as an alternative energy resource and its characteristics. Renew Sustain Energy Rev 2012;16:2070–93.
- [35] Hoekman SK, Broch A, Robbins C, Cenicerio E, Natarajan M. Review of biodiesel composition, properties, and specifications. Renew Sustain Energy Rev 2012;16: 143–69.
- [36] Wan Ghazali WNM, Mamat R, Masjuki HH, Najafi G. Effects of biodiesel from different feedstocks on engine performance and emissions: A review. Renew Sustain Energy Rev 2015;51:585–602.
- [37] Ruhul AM, Kalam MA, Masjuki HH, Alabdulkarem A, Atabani AE, Fattah IMR, et al. Production, characterization, engine performance and emission characteristics of Croton megalocarpus and Ceiba pentandra complementary blends in a single-cylinder diesel engine. RSC Adv 2016;6:24584–95.
- [38] Anwar M. Biodiesel feedstocks selection strategies based on economic, technical, and sustainable aspects. Fuel 2021;283:119204.
- [39] Anwar M, Rasul MG, Ashwath N. The efficacy of multiple-criteria design matrix for biodiesel feedstock selection. Energy Convers Manage 2019;198:111790.
- [40] Kamoun O, Muralitharan G, Belghith H, Gargouri A, Trigui-Lahiani H. Suitable carbon sources selection and ranking for biodiesel production by oleaginous *Mucor circinelloides* using multi-criteria analysis approach. Fuel 2019;257: 116117.
- [41] Ahmad FB, Zhang Z, Doherty WOS, O'Hara IM. A multi-criteria analysis approach for ranking and selection of microorganisms for the production of oils for biodiesel production. Bioresour Technol 2015;190:264–73.
- [42] Mofijur M, Masjuki H, Kalam M, Atabani A, Arbab M, Cheng S, et al. Properties and use of Moringa oleifera biodiesel and diesel fuel blends in a multi-cylinder diesel engine. Energy Convers Manage 2014;82:169–76.
- [43] Silitonga AS, Masjuki HH, Mahlia TMI, Ong HC, Chong WT, Boosroh MH. Overview properties of biodiesel diesel blends from edible and non-edible feedstock. Renew Sustain Energy Rev 2013;22:346–60.
- [44] Mahmudul HM, Hagos FY, Mamat R, Adam AA, Ishak FWF, Alenezi R. Production, characterization and performance of biodiesel as an alternative fuel in diesel engines – A review. Renew Sustain Energy Rev 2017;72:497–509.
- [45] Rahman MM, Rasul M, Hassan NMS. Study on the tribological characteristics of Australian native first generation and second generation biodiesel fuel. Energies. 2017;10:55.
- [46] Atabani A, Mofijur M, Masjuki H, Badruddin IA, Kalam M, Chong W. Effect of Croton megalocarpus, Calophyllum inophyllum, Moringa oleifera, palm and coconut biodiesel–diesel blending on their physico-chemical properties. Ind Crops Prod 2014;60:130–7.
- [47] Chauhan BS, Kumar N, Du Jun Y, Lee KBJE. Performance and emission study of preheated Jatropha oil on medium capacity diesel engine. Energy. 2010;35: 2484–92.
- [48] Chauhan BS, Kumar N, Cho HM. A study on the performance and emission of a diesel engine fueled with Jatropha biodiesel oil and its blends. Energy. 2012;37: 616–22.
- [49] Choi C, Reitz R. A numerical analysis of the emissions characteristics of biodiesel blended fuels. J Eng Gas Turbines Power. 1999;121:31–7.
- [50] Sajjad H, Masjuki HH, Varman M, Kalam M, Arbab M, Imtenan S, et al. Engine combustion, performance and emission characteristics of gas to liquid (GTL) fuels and its blends with diesel and bio-diesel. Renew Sustain Energy Rev 2014;30: 961–86.
- [51] Ghazali WNMW, Mamat R, Masjuki HH, Najafi G. Effects of biodiesel from different feedstocks on engine performance and emissions: A review. Renew Sustain Energy Rev 2015;51:585–602.
- [52] Sajjad H, Masjuki HH, Varman M, Kalam M, Arbab M, Imtenan S. et al. Engine combustion, performance and emission characteristics of gas to liquid (GTL) fuels and its blends with diesel and bio-diesel. 30 (2014) 961–86.
- [53] Mofijur M, Masjuki H, Kalam M, Atabani A. Evaluation of biodiesel blending, engine performance and emissions characteristics of Jatropha curcas methyl ester: Malaysian perspective. Energy. 2013;55:879–87.
- [54] Liaquat AM, Masjuki HH, Kalam MA, Rizwanul Fattah IM. Impact of biodiesel blend on injector deposit formation. Energy. 2014;72:813–23.
- [55] Rao P. Experimental investigations on the influence of properties of jatropha biodiesel on performance, combustion, and emission characteristics of a DI-CI engine. World Academy of Science, Engineering and Technology. 2011;75: 855–68.
- [56] Liaquat A, Masjuki HH, Kalam M, Fattah IR, Hazrat M, Varman M, et al. Effect of coconut biodiesel blended fuels on engine performance and emission characteristics. Procedia Eng 2013;56:583–90.
- [57] Misra R, Murthy M. Performance, emission and combustion evaluation of soapnut oil–diesel blends in a compression ignition engine. Fuel 2011;90:2514–8.

- [58] Bhuiya M, Rasul M, Khan M, Ashwath N, Azad A. Prospects of 2nd generation biodiesel as a sustainable fuel—Part: 1 selection of feedstocks, oil extraction techniques and conversion technologies. *Renew Sustain Energy Rev* 2016;55: 1109–28.
- [59] Sanjid A, Masjuki H, Kalam M, Rahman SA, Abedin M, Palash S. Impact of palm, mustard, waste cooking oil and Calophyllum inophyllum biofuels on performance and emission of CI engine. *Renew Sustain Energy Rev* 2013;27:664–82.
- [60] Sanjid A, Masjuki H, Kalam M, Rahman SA, Abedin M, Palash S. Production of palm and jatropha based biodiesel and investigation of palm-jatropha combined blend properties, performance, exhaust emission and noise in an unmodified diesel engine. *J Cleaner Prod* 2014;65:295–303.
- [61] Arbab M, Masjuki H, Varman M, Kalam M, Imtenan S, Sajjad H. Fuel properties, engine performance and emission characteristic of common biodiesels as a renewable and sustainable source of fuel. *Renew Sustain Energy Rev* 2013;22: 133–47.
- [62] Jayed M, Masjuki H, Kalam M, Mahlia T, Husnawan M, Liaquat A. Prospects of dedicated biodiesel engine vehicles in Malaysia and Indonesia. *Renew Sustain Energy Rev* 2011;15:220–35.
- [63] Lim S, Teong LK. Recent trends, opportunities and challenges of biodiesel in Malaysia: an overview. *Renew Sustain Energy Rev* 2010;14:938–54.
- [64] Atadashi I, Aroua MK, Aziz AA. High quality biodiesel and its diesel engine application: a review. *Renew Sustain Energy Rev* 2010;14:1999–2008.
- [65] Boog JHF, Silveira ELC, De Caland LB, Tubino M. Determining the residual alcohol in biodiesel through its flash point. *Fuel* 2011;90:905–7.
- [66] Imtenan S, Varman M, Masjuki HH, Kalam MA, Sajjad H, Arbab MI, et al. Impact of low temperature combustion attaining strategies on diesel engine emissions for diesel and biodiesels: A review. *Energy Convers Manage* 2014;80:329–56.
- [67] Fattah IR, Masjuki H, Liaquat A, Ramli R, Kalam M, Riazuddin V. Impact of various biodiesel fuels obtained from edible and non-edible oils on engine exhaust gas and noise emissions. *Renew Sustain Energy Rev* 2013;18:552–67.
- [68] Ming C, Rizwanul Fattah IM, Chan QN, Pham PX, Medwell PR, Kook S, et al. Combustion characterization of waste cooking oil and canola oil based biodiesels under simulated engine conditions. *Fuel* 2018;224:167–77.
- [69] Wu F, Wang J, Chen W, Shuai S. A study on emission performance of a diesel engine fueled with five typical methyl ester biodiesels. *Atmos Environ* 2009;43: 1481–5.
- [70] Van Gerpen J. Cetane number testing of biodiesel. In: Cundiff JS, editor. *Third Liquid Fuel Conference : Liquid fuel and industrial products from renewable resources*. St Joseph, MI, Nashville, Tennessee: American Society of Agricultural Engineers; 1996. p. 197–206.
- [71] Arbab MI, Varman M, Masjuki HH, Kalam MA, Imtenan S, Sajjad H, et al. Evaluation of combustion, performance, and emissions of optimum palm–coconut blend in turbocharged and non-turbocharged conditions of a diesel engine. *Energy Convers Manage* 2015;90:111–20.
- [72] Knothe G. Dependence of biodiesel fuel properties on the structure of fatty acid alkyl esters. *Fuel Process Technol* 2005;86:1059–70.
- [73] Fattah IMR, Masjuki HH, Kalam MA, Hazrat MA, Masum BM, Imtenan S, et al. Effect of antioxidants on oxidation stability of biodiesel derived from vegetable and animal based feedstocks. *Renew Sustain Energy Rev* 2014;30:356–70.
- [74] Tang H, Abunasser N, Wang A, Clark BR, Wadumesthrige K, Zeng S, et al. Quality survey of biodiesel blends sold at retail stations. *Fuel* 2008;87:2951–5.
- [75] Bouaid A, Martinez M, Aracil J. Production of biodiesel from bioethanol and Brassica carinata oil: oxidation stability study. *Bioresour Technol* 2009;100: 2234–9.
- [76] Sánchez-Arreola E, Bach H, Hernández LR. Biodiesel production from Cascabela ovata seed oil. *Bioresour Technology Reports*. 2019;7:100220.
- [77] Cho S-M, Kim J-H, Kim S-H, Park S-Y, Kim J-C, Choi I-G. A comparative study on the fuel properties of biodiesel from woody essential oil depending on terpene composition. *Fuel* 2018;218:375–84.
- [78] Rosa HA, Wazilewski WT, Secco D, Chaves LI, Veloso G, de Souza SNM, et al. Biodiesel produced from crambe oil in Brazil—A study of performance and emissions in a diesel cycle engine generator. *Renew Sustain Energy Rev* 2014;38: 651–5.
- [79] Arun SB, Suresh R, Yatish KV. Biodiesel Production and Investigation of Fuel Properties. *Mater Today: Proc* 2019;17:186–90.
- [80] Srikanth HV, Venkatesh J, Godiganur S, Manne B. Acetone and Diethyl ether: Improve cold flow properties of Dairy Washed Milkscum biodiesel. *Renewable Energy* 2019;130:446–51.
- [81] Ching-Velasquez J, Fernández-Lafuente R, Rodrigues RC, Plata V, Rosales-Quintero A, Torrestiana-Sánchez B, et al. Production and characterization of biodiesel from oil of fish waste by enzymatic catalysis. *Renewable Energy* 2020; 153:1346–54.
- [82] Dhar Dubey KK, Jeyaseelan C, Upadhyaya KC, Chimote V, Veluchamy R, Kumar A. Biodiesel production from Hiptage benghalensis seed oil. *Ind Crops Prod* 2020;144:112027.
- [83] Lin C-Y, Li R-J. Fuel properties of biodiesel produced from the crude fish oil from the soapstock of marine fish. *Fuel Process Technol* 2009;90:130–6.
- [84] Nautiyal P, Subramanian KA, Dastidar MG. Production and characterization of biodiesel from algae. *Fuel Process Technol* 2014;120:79–88.
- [85] Yusuff AS, Owolabi JO. Synthesis and characterization of alumina supported coconut chaff catalyst for biodiesel production from waste frying oil. *S Afr J Chem Eng* 2019;30:42–9.
- [86] Ikwuagwu O, Ononogbu I, Njoku O. Production of biodiesel using rubber [Hevea brasiliensis (Kunth. Muell.) seed oil. *Ind Crops Prod* 2000;12:57–62.
- [87] Kumar R, Tiwari P, Garg S. Alkali transesterification of linseed oil for biodiesel production. *Fuel* 2013;104:553–60.
- [88] Dixit S, Rehman A. Linseed oil as a potential resource for bio-diesel: a review. *Renew Sustain Energy Rev* 2012;16:4415–21.
- [89] Ezekoye V, Adinde R, Ezekoye D, Ofomatah A. Syntheses and characterization of biodiesel from citrus sinensis seed oil. *Scientific African*. 2019;6:e00217.
- [90] Tüccar G, Tosun E, Özgür T, Aydın K. Diesel engine emissions and performance from blends of citrus sinensis biodiesel and diesel fuel. *Fuel* 2014;132:7–11.
- [91] Kadir Yesilyurt M, Cesur C. Biodiesel synthesis from Styrax officinalis L. seed oil as a novel and potential non-edible feedstock: A parametric optimization study through the Taguchi technique. *Fuel* 2020;265:117025.
- [92] Ghareghani A, Mirsalim M, Hosseini R. Effects of waste fish oil biodiesel on diesel engine combustion characteristics and emission. *Renewable Energy* 2017; 101:930–6.
- [93] Atapour M, Kariminia H-R. Characterization and transesterification of Iranian bitter almond oil for biodiesel production. *Appl Energy* 2011;88:2377–81.
- [94] Abu-Hamdeh NH, Alnefaie KA. A comparative study of almond and palm oils as two bio-diesel fuels for diesel engine in terms of emissions and performance. *Fuel* 2015;150:318–24.
- [95] Behçet R, Oktay H, Çakmak A, Aydın H. Comparison of exhaust emissions of biodiesel–diesel fuel blends produced from animal fats. *Renew Sustain Energy Rev* 2015;46:157–65.
- [96] Ma Y, Bi Q, Li G, Liu X, Fu G, Zhao Y, et al. Provenance variations in kernel oil content, fatty acid profile and biodiesel properties of Xanthoceras sorbifolium Bunge in northern China. *Ind Crops Prod* 2020;151:112487.
- [97] Shen Z, Zhang K, Ao Y, Ma L, Duan J. Evaluation of biodiesel from Xanthoceras sorbifolia Bunge seed kernel oil from 13 areas in China. *J For Res* 2019;30: 869–77.
- [98] Singh M, Sandhu SS. Performance, emission and combustion characteristics of multi-cylinder CRDI engine fueled with argemone biodiesel/diesel blends. *Fuel* 2020;265:117024.
- [99] Sharma M, Khan AA, Dohhen KC, Christopher J, Puri SK, Tuli DK, et al. A Heterogeneous Catalyst for Transesterification of Argemone mexicana Oil. *J Am Oil Chem Soc* 2012;89:1545–55.
- [100] Alptekin E, Canakci M, Sanli H. Biodiesel production from vegetable oil and waste animal fats in a pilot plant. *Waste Manage* 2014;34:2146–54.
- [101] Sbihi HM, Nehdi IA, Tan CP, Al-Resayes SI. Production and characterization of biodiesel from Camelus dromedarius (Hachi) fat. *Energy Convers Manage* 2014; 78:50–7.
- [102] Seffati K, Honarvar B, Esmaili H, Efsandiari N. Enhanced biodiesel production from chicken fat using CaO/CuFe2O4 nanocatalyst and its combination with diesel to improve fuel properties. *Fuel* 2019;235:1238–44.
- [103] Arnaud E, Trystram G, Relkin P, Collignan A. Thermal characterization of chicken fat dry fractionation process. *J Food Eng* 2006;72:390–7.
- [104] Ramadhas AS, Jayaraj S, Muraleedharan C. Biodiesel production from high FFA rubber seed oil. *Fuel* 2005;84:335–40.
- [105] No S-Y. Inedible vegetable oils and their derivatives for alternative diesel fuels in CI engines: A review. *Renew Sustain Energy Rev* 2011;15:131–49.
- [106] Yaşar F. Comparison of fuel properties of biodiesel fuels produced from different oils to determine the most suitable feedstock type. *Fuel* 2020;264:116817.
- [107] Singh N, Goyal A, Moholkar VS. Microalgal bio-refinery approach for utilization of Tetrademus obliquus biomass for biodiesel production. *Mater Today: Proc* 2020.
- [108] Moser BR, Vaughn SF. Evaluation of alkyl esters from Camelina sativa oil as biodiesel and as blend components in ultra low-sulfur diesel fuel. *Bioresour Technol* 2010;101:646–53.
- [109] Fadhlil AB, Abdulahad WS. Transesterification of mustard (Brassica nigra) seed oil with ethanol: purification of the crude ethyl ester with activated carbon produced from de-oiled cake. *Energy Convers Manage* 2014;77:495–503.
- [110] Jeyalakshmi P. Characterization of Simarouba glauca seed oil biodiesel. *J Therm Anal Calorim* 2019;136:267–80.
- [111] Younis KA, Gardy JL, Barzinji KS. Production and characterization of biodiesel from locally sourced sesame seed oil, used cooking oil and other commercial vegetable oils in Erbil-Iraqi Kurdistan. *American Journal of Applied Chemistry*. 2014;2:105–11.
- [112] Das M, Sarkar M, Datta A, Santra AK. Study on viscosity and surface tension properties of biodiesel–diesel blends and their effects on spray parameters for CI engines. *Fuel* 2018;220:769–79.
- [113] Hotti S, Hebhal O. Biodiesel production and fuel properties from non-edible Champaca (Michelia champaca) seed oil for use in diesel engine. *Journal of Thermal Engineering*. 2015;1:330–6.
- [114] Moser BR, S.F.J.B.T. Vaughn. Evaluation of alkyl esters from Camelina sativa oil as biodiesel and as blend components in ultra low-sulfur diesel fuel. 101 (2010) 646-53.
- [115] Ramadhas AS, Jayaraj S, Muraleedharan CJF. Biodiesel production from high FFA rubber seed oil. 84 (2005) 335-40.
- [116] Mihaela P, Josef R, Monica N, Rudolf Z. Perspectives of safflower oil as biodiesel source for South Eastern Europe (comparative study: Safflower, soybean and rapeseed). *Fuel* 2013;111:114–9.
- [117] Sarin R, Sharma M, Sinharay S, Malhotra RK. Jatropha–palm biodiesel blends: an optimum mix for Asia. *Fuel* 2007;86:1365–71.
- [118] Cavalheiro LF, Misutsu MY, Rial RC, Viana LH, Oliveira LCS. Characterization of residues and evaluation of the physico chemical properties of soybean biodiesel and biodiesel: Diesel blends in different storage conditions. *Renewable Energy* 2020;151:454–62.
- [119] Agarwal AK, Khurana D, Dhar A. Improving oxidation stability of biodiesels derived from Karanja, Neem and Jatropha: step forward in the direction of commercialisation. *J Cleaner Prod* 2015;107:646–52.

- [120] Betiku E, Omilakin OR, Ajala SO, Okeleye AA, Taiwo AE, Solomon BO. Mathematical modeling and process parameters optimization studies by artificial neural network and response surface methodology: A case of non-edible neem (*Azadirachta indica*) seed oil biodiesel synthesis. *Energy*. 2014;72:266–73.
- [121] Balaji G, Cheralathan M. Experimental investigation of antioxidant effect on oxidation stability and emissions in a methyl ester of neem oil fueled DI diesel engine. *Renewable Energy* 2015;74:910–6.
- [122] Usta N, Aydoğan B, Çon A, Uğuzdoğan E, Özkal S. Properties and quality verification of biodiesel produced from tobacco seed oil. *Energy Convers Manage* 2011;52:2031–9.
- [123] Usta N. Use of tobacco seed oil methyl ester in a turbocharged indirect injection diesel engine. *Biomass Bioenergy* 2005;28:77–86.
- [124] Panwar N, Shrirame HY, Rathore N, Jindal S, Kurchania A. Performance evaluation of a diesel engine fueled with methyl ester of castor seed oil. *Appl Therm Eng* 2010;30:245–9.
- [125] Nurdin S, Rosnan NA, Ghazali NS, Gimbut J, Nour AH, Haron SF. Economical biodiesel fuel synthesis from castor oil using mussel shell-base catalyst (MS-BC). *Energy Procedia* 2015;79:576–83.
- [126] Armendáriz J, Lapuerta M, Zavala F, García-Zambrano E, del Carmen Ojeda M. Evaluation of eleven genotypes of castor oil plant (*Ricinus communis* L.) for the production of biodiesel. *Ind Crops Prod* 2015;77:484–90.
- [127] Chidambaramanathan B, Gopinath S, Aravindraj R, Devaraj A, Gokula Krishnan S, Jeevaanathan JKS. The production of biodiesel from castor oil as a potential feedstock and its usage in compression ignition Engine: A comprehensive review. *Mater Today: Proc* 2020.
- [128] Keera ST, El Sabagh SM, Taman AR. Castor oil biodiesel production and optimization. *Egypt J Pet* 2018;27:979–84.
- [129] Attia AMA, Nour M, Nada SA. Study of Egyptian castor biodiesel-diesel fuel properties and diesel engine performance for a wide range of blending ratios and operating conditions for the sake of the optimal blending ratio. *Energy Convers Manage* 2018;174:364–77.
- [130] Chellappa T, Santa Rosa JGDS, Santos DLF, Boufleuer RN, Paiva IVDL, Léger T, et al. Oxidative stability of blended sunflower and castor biodiesel by Rancimat and static mode P-DSC. *Energy Sources Part A* 2019;1–10.
- [131] Sun C, Liu Y, Qiao X, Ju D, Tang Q, Fang X, et al. Experimental study of effects of exhaust gas recirculation on combustion, performance, and emissions of DME-biodiesel fueled engine. *Energy*. 2020;197:117233.
- [132] Kamran E, Mashhadi H, Mohammadi A, Ghobadian B. Biodiesel production from *Elaeagnus angustifolia* L seed as a novel waste feedstock using potassium hydroxide catalyst. *Biocatalysis and Agricultural. Biotechnology* 2020;25: 101578.
- [133] Lama-Muñoz A, Álvarez-Mateos P, Rodríguez-Gutiérrez G, Durán-Barrantes MM, Fernández-Bolaños J. Biodiesel production from olive-pomace oil of steam-treated alperujo. *Biomass Bioenergy* 2014;67:443–50.
- [134] López I, Quintana C, Ruiz J, Cruz-Peragón F, Dorado M. Effect of the use of olive-pomace oil biodiesel/diesel fuel blends in a compression ignition engine: Preliminary exergy analysis. *Energy Convers Manage* 2014;85:227–38.
- [135] Islam MA, Heimann K, Brown RJ. Microalgae biodiesel: Current status and future needs for engine performance and emissions. *Renew Sustain Energy Rev* 2017;79: 1160–70.
- [136] Al-Iwayzy SH, Yusaf T. Diesel engine performance and exhaust gas emissions using Microalgae *Chlorella protothecoides* biodiesel. *Renewable Energy* 2017; 101:690–701.
- [137] Raman LA, Deepanraj B, Rajakumar S, Sivasubramanian V. Experimental investigation on performance, combustion and emission analysis of a direct injection diesel engine fuelled with rapeseed oil biodiesel. *Fuel* 2019;246:69–74.
- [138] Mihaila P, Josef R, Monica N. Rudolf ZJF. Perspectives of safflower oil as biodiesel source for South Eastern Europe (comparative study: Safflower, soybean and rapeseed). 111 (2013) 114–9.
- [139] Kuszewski H. Experimental investigation of the autoignition properties of ethanol–biodiesel fuel blends. *Fuel* 2019;235:1301–8.
- [140] Ghadikolaei MA, Wei L, Cheung CS, Yung K-F, Ning Z. Particulate emission and physical properties of particulate matter emitted from a diesel engine fuelled with ternary fuel (diesel-biodiesel-ethanol) in blended and fumigation modes. *Fuel* 2020;263:116665.
- [141] Bencheikh K, Atabani AE, Shobana S, Mohammed MN, Uğuz G, Arpa O, et al. Fuels properties, characterizations and engine and emission performance analyses of ternary waste cooking oil biodiesel–diesel–propanol blends. *Sustainable Energy Technol Assess* 2019;35:321–34.
- [142] Enweremadu CC, Rutto HL. Combustion, emission and engine performance characteristics of used cooking oil biodiesel—A review. *Renew Sustain Energy Rev* 2010;14:2863–73.
- [143] Borah MJ, Das A, Das V, Bhuyan N, Deka D. Transesterification of waste cooking oil for biodiesel production catalyzed by Zn substituted waste egg shell derived CaO nanocatalyst. *Fuel* 2019;242:345–54.
- [144] Ikwaagwu O, Ononogbu I. Njoku OJC. products. Production of biodiesel using rubber [Hevea brasiliensis (Kunth. Muell.)] seed oil. 12 (2000) 57–62.
- [145] Ni Z-H, Li F-S, Wang H, Wang S, Gao S-Y, Zhou L. Antioxidative performance and oil-soluble properties of conventional antioxidants in rubber seed oil biodiesel. *Renewable Energy* 2020;145:93–8.
- [146] İlkılıç C, Aydın S, Behcet R, Aydın H. Biodiesel from safflower oil and its application in a diesel engine. *Fuel Process Technol* 2011;92:356–62.
- [147] Liu Z, Li F, Shen J, h. Wang. Effect of oxidation of *Jatropha curcas*-derived biodiesel on its lubricating properties. *Energy for Sustainable Development*. 2019; 52:33–9.
- [148] Sarin R, Sharma M, Sinharay S, Malhotra RKJF. *Jatropha*–palm biodiesel blends: an optimum mix for. *Asia*. 2007;86:1365–71.
- [149] Gad MS, Jayaraj S. A comparative study on the effect of nano-additives on the performance and emissions of a diesel engine run on *Jatropha* biodiesel. *Fuel* 2020;267:117168.
- [150] Amalia Kartika I, Yani M, Ariono D, Evon P, Rigal L. Biodiesel production from *jatropha* seeds: Solvent extraction and in situ transesterification in a single step. *Fuel* 2013;106:111–7.
- [151] Yaşar F. Biodiesel production via waste eggshell as a low-cost heterogeneous catalyst: Its effects on some critical fuel properties and comparison with CaO. *Fuel* 2019;255:115828.
- [152] Öztürk E. Performance, emissions, combustion and injection characteristics of a diesel engine fuelled with canola oil–hazelnut soapstock biodiesel mixture. *Fuel Process Technol* 2015;129:183–91.
- [153] S.D. Sanford, J.M. White, P.S. Shah, C. Wee, M.A. Valverde, G.R.J.R.E.G. Meier. Feedstock and biodiesel characteristics report. URL: [https://biodieseleducation.org/Feedstock/documents/Feedstock%20and%20Biodiesel%20Characteristics%20Report%20\(1\).pdf](https://biodieseleducation.org/Feedstock/documents/Feedstock%20and%20Biodiesel%20Characteristics%20Report%20(1).pdf). in: R.E. Group, (Ed.) 2009.
- [154] Ge JC, Yoon SK, Choi NJ. Using canola oil biodiesel as an alternative fuel in diesel engines: A review. *Applied Sciences*. 2017;7:881.
- [155] Jalilantabar F, Ghobadian B, Carlucci AP, Najafi G, Ficarella A, Strafella L, et al. Comparative evaluation of physical and chemical properties, emission and combustion characteristics of brassica, cardoon and coffee based biodiesels as fuel in a compression-ignition engine. *Fuel* 2018;222:156–74.
- [156] Dang C-H, Nguyen T-D. Physicochemical Characterization of Robusta Spent Coffee Ground Oil for Biodiesel Manufacturing. *Waste Biomass Valorization* 2019; 10:2703–12.
- [157] Uddin MN, Techato K, Rasul MG, Hassan NMS, Mofijur M. Waste coffee oil: A promising source for biodiesel production. *Energy Procedia* 2019;160:677–82.
- [158] Mathimani T, Senthil Kumar T, Chandrasekar M, Uma L, Prabaharan D. Assessment of fuel properties, engine performance and emission characteristics of outdoor grown marine *Chlorella vulgaris* BDUG 91771 biodiesel. *Renewable Energy* 2017;105:637–46.
- [159] Mallick N, Mandal S, Singh AK, Bishai M, Dash A. Green microalga *Chlorella vulgaris* as a potential feedstock for biodiesel. *J Chem Technol Biotechnol* 2012; 87:137–45.
- [160] Ahmad F, Khan AU, Yasar A. The potential of *Chlorella vulgaris* for wastewater treatment and biodiesel production. *Pak J Bot* 2013;45:461–5.
- [161] Pandit PR, Fulekar MH, Karuna MSL. Effect of salinity stress on growth, lipid productivity, fatty acid composition, and biodiesel properties in *Acetodesmus obliquus* and *Chlorella vulgaris*. *Environ Sci Pollut Res* 2017;24:13437–51.
- [162] Sanford SD, White JM, Shah PS, Wee C, Valverde MA, G.R.J.R.E.G. Meier. Feedstock and biodiesel characteristics report. 416 (2009) 1–136.
- [163] Saravanan N, Nagarajan G, Puhan S. Experimental investigation on a DI diesel engine fuelled with Madhuca Indica ester and diesel blend. *Biomass Bioenergy* 2010;34:838–43.
- [164] Acharya N, Nanda P, Panda S, Acharya S. A comparative study of stability characteristics of mahua and *jatropha* biodiesel and their blends. *Journal of King Saud University - Engineering Sciences*. 2019;31:184–90.
- [165] Güllüm M, Bilgin A. Density, flash point and heating value variations of corn oil biodiesel–diesel fuel blends. *Fuel Process Technol* 2015;134:456–64.
- [166] Sanjid A, Masjuki H, Kalam M, Abedin M, Rahman SA. Experimental investigation of mustard biodiesel blend properties, performance, exhaust emission and noise in an unmodified diesel engine. *APCBEE Procedia*. 2014;10:149–53.
- [167] A.B. Fadhil, W.S.J.E.c. Abdulahad, management. Transesterification of mustard (*Brassica nigra*) seed oil with ethanol: purification of the crude ethyl ester with activated carbon produced from de-oiled cake. 77 (2014) 495–503.
- [168] Ahmed S, Hassan MH, Kalam MA, Ashrafur Rahman SM, Abedin MJ, Shahir A. An experimental investigation of biodiesel production, characterization, engine performance, emission and noise of *Brassica juncea* methyl ester and its blends. *J Cleaner Prod* 2014;79:74–81.
- [169] Fauzan NA, Tan ES, Pua FL, Muthaiyah G. Physicochemical properties evaluation of *Calophyllum inophyllum* biodiesel for gas turbine application. *S Afr J Chem Eng* 2020;32:56–61.
- [170] Rizwanul Fattah IM, Masjuki HH, Kalam MA, Wakil MA, Ashrafur AM, Shahir SA. Experimental investigation of performance and regulated emissions of a diesel engine with *Calophyllum inophyllum* biodiesel blends accompanied by oxidation inhibitors. *Energy Convers Manage* 2014;83:232–40.
- [171] Ong HC, Masjuki HH, Mahlia TMI, Silitonga AS, Chong WT, Yusaf T. Engine performance and emissions using *Jatropha curcas*, *Ceiba pentandra* and *Calophyllum inophyllum* biodiesel in a CI diesel engine. *Energy*. 2014;69:427–45.
- [172] Ong HC, Milano J, Silitonga AS, Hassan MH, Shamsuddin AH, Wang CT, et al. Biodiesel production from *Calophyllum inophyllum*-*Ceiba pentandra* oil mixture: Optimization and characterization. *J Cleaner Prod* 2019;219:183–98.
- [173] Karmee SK, Chadha A. Preparation of biodiesel from crude oil of *Pongamia pinnata*. *Bioresour Technol* 2005;96:1425–9.
- [174] Pinzi S, Garcia I, Lopez-Gimenez F, Luque de Castro M, Dorado G, Dorado M. The ideal vegetable oil-based biodiesel composition: a review of social, economical and technical implications. *Energy Fuels* 2009;23:2325–41.
- [175] Raheman H, Phadate A. Diesel engine emissions and performance from blends of *karanja* methyl ester and diesel. *Biomass Bioenergy* 2004;27:393–7.
- [176] Patel C, Agarwal AK, Tiwari N, Lee S, Lee CS, Park S. Combustion, noise, vibrations and spray characterization for *Karanja* biodiesel fuelled engine. *Appl Therm Eng* 2016;106:506–17.

- [177] Allami HA, Tabaszadeh M, Rohani A, Nayebzadeh H, Farzad A. Effect of ultrasonic irradiation on the properties and performance of biodiesel produced from date seed oil used in the diesel engine. *Ultrason Sonochem* 2020;60:104672.
- [178] Allami HA, Tabaszadeh M, Rohani A, Farzad A, Nayebzadeh H. Precise evaluation the effect of microwave irradiation on the properties of palm kernel oil biodiesel used in a diesel engine. *J Cleaner Prod* 2019;241:117777.
- [179] dos Santos ICF, de Carvalho SHV, Solleti JI, Ferreira de La Salles W, K. Teixeira da Silva de La Salles, S.M.P. Meneghetti. Studies of Terminalia catappa L. oil: Characterization and biodiesel production. *Bioresour Technol* 2008;99:6545–9.
- [180] Adewuyi A, Oderinde RA, Ojo DFK. Production of biodiesel from Terminalia catappa seed oil with high free fatty acids using an acid-catalyzed pretreatment step. *Int J Sustain Energy* 2011;30:S59–65.
- [181] Sharma Y, Singh B. An ideal feedstock, kusum (*Schleichera triguga*) for preparation of biodiesel: Optimization of parameters. *Fuel* 2010;89:1470–4.
- [182] Yadav AK, Khan ME, Pal A, Dubey AM. Experimental Investigations of Performance and Emissions Characteristics of Kusum (*Schleichera Oleosa*) Biodiesel in a Multi-Cylinder Transportation Diesel Engine. *Waste Biomass Valorization* 2017;8:1331–41.
- [183] Pali HS, Kumar N. Comparative assessment of sal and kusum biodiesel properties. *Energy Sources Part A* 2016;38:3391–6.
- [184] Booramurthy VK, Kasimani R, Subramanian D, Pandian S. Production of biodiesel from tannery waste using a stable and recyclable nano-catalyst: An optimization and kinetic study. *Fuel* 2020;260:116373.
- [185] Bhuiya MMK, Rasul MG, Khan MMK, Ashwath N. Biodiesel production and characterisation of poppy (*Papaver somniferum* L.) seed oil methyl ester as a source of 2nd generation biodiesel feedstock. *Ind Crops Prod* 2020;152:112493.
- [186] Singh S, Singh DJR. s.e. reviews. Biodiesel production through the use of different sources and characterization of oils and their esters as the substitute of diesel: a review. 14 (2010) 200-16.
- [187] Chandran D, Gan S, Lau HLN, Raviadaran R, Salim M, Khalid M. Critical relationship between biodiesel fuel properties and degradation of fuel delivery materials of a diesel engine. *Thermal Science and Engineering Progress*. 2018;7: 20–6.
- [188] Baena LM, Calderón JA. Effects of palm biodiesel and blends of biodiesel with organic acids on metals. *Heliyon*. 2020;6:e03735.
- [189] K.A. Younis, J.L. Gardy, K.S.J.A.J.o.A.C. Barzinji. Production and characterization of biodiesel from locally sourced sesame seed oil, used cooking oil and other commercial vegetable oils in Erbil-Iraqi Kurdistan. 2 (2014) 105-11.
- [190] Sarve A, Sonawane SS, Varma MN. Ultrasound assisted biodiesel production from sesame (*Sesamum indicum* L.) oil using barium hydroxide as a heterogeneous catalyst: Comparative assessment of prediction abilities between response surface methodology (RSM) and artificial neural network (ANN). *Ultrason Sonochem* 2015;26:218–28.
- [191] Bello E, Daniel F. Optimization of groundnut oil biodiesel production and characterization. *Applied Science Reports*. 2015;9:172–80.
- [192] Öner C, Altun Ş. Biodiesel production from inedible animal tallow and an experimental investigation of its use as alternative fuel in a direct injection diesel engine. *Appl Energy* 2009;86:2114–20.
- [193] B.Q. Araújo, R.C.d.R. Nunes, C.V.R. de Moura, E.M. de Moura, A.M.d.G.L. Citó, J. R. dos Santos Júnior. Synthesis and Characterization of Beef Tallow Biodiesel. *Energy & Fuels*. 24 (2010) 4476-80.
- [194] Deka DC, Basumatary S. High quality biodiesel from yellow oleander (*Thevetia peruviana*) seed oil. *Biomass Bioenergy* 2011;35:1797–803.
- [195] Yadav AK, Khan ME, Pal A, Dubey AM. Performance, emission and combustion characteristics of an Indica diesel engine operated with Yellow Oleander (*Thevetia peruviana*) oil biodiesel produced through hydrodynamic cavitation method. *Int J Ambient Energy* 2018;39:365–71.
- [196] E.J.F.P.T. Öztürk. Performance, emissions, combustion and injection characteristics of a diesel engine fuelled with canola oil–hazelnut soapstock biodiesel mixture. 129 (2015) 183-91.
- [197] Abreu FR, Lima DG, Hamú EH, Wólf C, Suarez PA. Utilization of metal complexes as catalysts in the transesterification of Brazilian vegetable oils with different alcohols. *J Mol Catal A: Chem* 2004;209:29–33.
- [198] Canoira L, Alcantara R, García-Martínez MJ, Carrasco J. Biodiesel from Jojoba oil-wax: Transesterification with methanol and properties as a fuel. *Biomass Bioenergy* 2006;30:76–81.
- [199] N. Panwar, H.Y. Shrirame, N. Rathore, S. Jindal, A.J.A.T.E. Kurchania. Performance evaluation of a diesel engine fueled with methyl ester of castor seed oil. 30 (2010) 245-9.
- [200] Selim MYE. Reducing the viscosity of Jojoba Methyl Ester diesel fuel and effects on diesel engine performance and roughness. *Energy Convers Manage* 2009;50: 1781–8.
- [201] Ballesteros R, Monedero E, Guillén-Flores J. Determination of aldehydes and ketones with high atmospheric reactivity on diesel exhaust using a biofuel from animal fats. *Atmos Environ* 2011;45:2690–8.
- [202] Abollé A, Loukou K, Henri P. The density and cloud point of diesel oil mixtures with the straight vegetable oils (SVO): Palm, cabbage palm, cotton, groundnut, copra and sunflower. *Biomass Bioenergy* 2009;33:1653–9.
- [203] Bora BJ, Saha UK. Experimental evaluation of a rice bran biodiesel–biogas run dual fuel diesel engine at varying compression ratios. *Renewable Energy* 2016;87: 782–90.
- [204] Zhang Y, Wong W-T, Yung K-F. One-step production of biodiesel from rice bran oil catalyzed by chlorosulfonic acid modified zirconia via simultaneous esterification and transesterification. *Bioresour Technol* 2013;147:59–64.
- [205] Evangelista JP, Chellappa T, Coriolano AC, Fernandes Jr VJ, Souza LD, Araujo AS. Synthesis of alumina impregnated with potassium iodide catalyst for biodiesel production from rice bran oil. *Fuel Process Technol* 2012;104:90–5.
- [206] El Boulifi N, Bouaid A, Martinez M, Aracil J. Optimization and oxidative stability of biodiesel production from rice bran oil. *Renewable Energy* 2013;53:141–7.
- [207] Yoon SK, Ge JC, Choi NJ. Influence of fuel injection pressure on the emissions characteristics and engine performance in a CRDI Diesel engine fueled with palm biodiesel blends. *Energies*. 2019;12:3837.
- [208] A. Sanjid, H. Masjuki, M. Kalam, S.A. Rahman, M. Abedin, S.J.J.o.C.P. Palash. Production of palm and jatropha based biodiesel and investigation of palm-jatropha combined blend properties, performance, exhaust emission and noise in an unmodified diesel engine. 65 (2014) 295-303.
- [209] Patel C, Tiwari N, Agarwal AK. Experimental investigations of Soyabean and Rapeseed SVO and biodiesels on engine noise, vibrations, and engine characteristics. *Fuel* 2019;238:86–97.
- [210] Dhar A, Agarwal AK. Performance, emissions and combustion characteristics of Karanja biodiesel in a transportation engine. *Fuel* 2014;119:70–80.
- [211] Chauhan BS, Kumar N, Cho HM, Lim HC. A study on the performance and emission of a diesel engine fueled with Karanja biodiesel and its blends. *Energy*. 2013;56:1–7.
- [212] Utlu Z, Koçak MS. The effect of biodiesel fuel obtained from waste frying oil on direct injection diesel engine performance and exhaust emissions. *Renewable Energy* 2008;33:1936–41.
- [213] Hasib ZM, Hossain J, Biswas S, Islam A. Bio-diesel from mustard oil: A renewable alternative fuel for small diesel engines. *Modern Mechanical Engineering*. 2011;1: 77–83.
- [214] Anbumani K, Singh AP. Performance of mustard and neem oil blends with diesel fuel in CI engine. *Carbon* 2006;86.
- [215] Di Y, Cheung CS, Huang Z. Comparison of the Effect of Biodiesel-Diesel and Ethanol-Diesel on the Particulate Emissions of a Direct Injection Diesel Engine. *Aerosol Sci Technol* 2009;43:455–65.
- [216] Canakci M. Combustion characteristics of a turbocharged DI compression ignition engine fueled with petroleum diesel fuels and biodiesel. *Bioresour Technol* 2007; 98:1167–75.
- [217] Rahman MM, Hassan MH, Kalam MA, Atabani AE, Memon LA, Rahman SMA. Performance and emission analysis of Jatropha curcas and Moringa oleifera methyl ester fuel blends in a multi-cylinder diesel engine. *J Cleaner Prod* 2014;65: 304–10.
- [218] Sahoo PK, Das LM, Babu MKG, Arora P, Singh VP, Kumar NR, et al. Comparative evaluation of performance and emission characteristics of jatropha, karanja and polanga based biodiesel as fuel in a tractor engine. *Fuel* 2009;88:1698–707.
- [219] Özener O, Yüksek L, Ergenç AT, Özkan M. Effects of soybean biodiesel on a DI diesel engine performance, emission and combustion characteristics. *Fuel* 2014; 115:875–83.
- [220] Forson F, Odoro E, Hammond-Donkoh E. Performance of jatropha oil blends in a diesel engine. *Renewable Energy* 2004;29:1135–45.
- [221] Agarwal D, Agarwal AK. Performance and emissions characteristics of Jatropha oil (preheated and blends) in a direct injection compression ignition engine. *Appl Therm Eng* 2007;27:2314–23.
- [222] Labeckas G, Slavinskas S. The effect of rapeseed oil methyl ester on direct injection diesel engine performance and exhaust emissions. *Energy Convers Manage* 2006;47:1954–67.
- [223] Pereira RG, Oliveira CD, Oliveira JL, Oliveira PCP, Fellows CE, Piamba OE. Exhaust emissions and electric energy generation in a stationary engine using blends of diesel and soybean biodiesel. *Renewable Energy* 2007;32:2453–60.
- [224] Habibullah M, Masjuki HH, Kalam MA, Rizwanul Fattah IM, Ashraf AM, Mobarak HM. Biodiesel production and performance evaluation of coaroful, palm and their combined blend with diesel in a single-cylinder diesel engine. *Energy Convers Manage* 2014;87:250–7.
- [225] Habibullah M, Rizwanul Fattah IM, Masjuki HH, Kalam MA. Effects of Palm-Coconut Biodiesel Blends on the Performance and Emission of a Single-Cylinder Diesel Engine. *Energy Fuels* 2015;29:734–43.
- [226] Hussain F, Soudagar MEM, Afzal A, Mujtaba M, Fattah IMR, Naik B, et al. Enhancement in Combustion, Performance, and Emission Characteristics of a Diesel Engine Fueled with Ce-ZnO Nanoparticle Additive Added to Soybean Biodiesel Blends. *Energies*. 2020;13:4578.
- [227] Mujtaba MA, Masjuki HH, Kalam MA, Noor F, Farooq M, Ong HC, et al. Effect of Additized Biodiesel Blends on Diesel Engine Performance, Emission, Tribological Characteristics, and Lubricant Tribology. *Energies*. 2020;13:3375.